

C O N I C A L   P L A T F O R M

---

# PRODUCT CATALOG



Q<sub>p</sub>

ENG  
1.0



■ All solutions for a perfect smile.

Implant Reliability  
Drills Prosthetic  
Surgical kits  
About  
Titanium Knowledge  
Zirconium  
Education  
Long warranty  
Quality  
Surgical tools  
cap  
Favorable prices  
Surgical instruments  
Ratchet Hex Driver  
Wide range of sizes  
Conus platform  
Bone type  
SGS De  
Anatomic  
Ball attachment  
Angular  
SGS De  
Anatomic  
Wide range of sizes




Company profile .....	4 - 5
Surface treatment .....	6 - 11
Packaging system.....	12
Sign index .....	13
Implant systems.....	14 - 15
Surgical drills .....	16-17
Surgical kits.....	18 - 24



P7N dental implant .....	26
Surgical tools for P7N.....	27
Healing abutments .....	28
Impression transfers / Analog.....	29
Straight abutments.....	30
Angular abutments / S - Lock abutments.....	31
Zirconium abutments / Peek abutments.....	32
Overdenture ball attachments .....	33
CAD-CAM .....	30



P7S dental implant .....	72 - 73
P9S dental implant.....	74
Tools and drivers for P7S/P9S.....	75

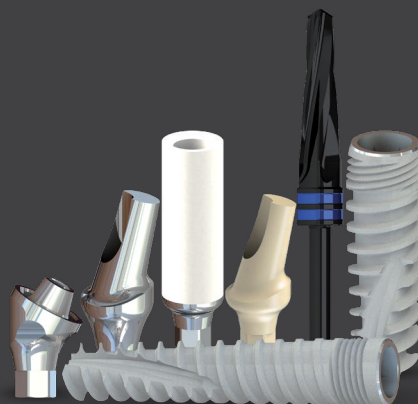

## TABLE OF CONTENTS



Surgical Tools .....	37
P7D dental implant.....	38 - 39
P1D dental implant.....	40 - 41
Healing abutments .....	42
Impression transfers.....	43
Analog .....	44
Straight abutments.....	45
Angular abutments.....	46
Anatomic angular abutments.....	47
Zirconium abutments.....	48
Abutments for casting .....	49
Temporary abutments.....	50 - 51
CAD-CAM .....	52 - 53
Overdenture ball attachments .....	54 - 55
Abutments for immediate loading .....	56 - 57
Overdenture S-Lock abutments.....	58 - 59
Overdenture Easy-Fix abutments .....	60 - 61
Overdenture Smart - Lock abutments .....	62 - 63
Straight multi-unit abutments .....	64 - 65
Multi-base abutments .....	66 - 67
The-One multi-unit abutments.....	68 - 69
Flat connection abutments .....	70



## Company profile

**S**GS International Ltd. had been incorporated in Liechtenstein, Schaan with aim to offer the customers a comprehensive range of innovative, science-based dental solutions. SGS Dental Implant System is not only a dental product, but it is about art and experience in clinical practise as well.

Thanks to qualitative Swiss technology SGS Dental Implant System provides excellent products on competitive prices with strong support. We use the most precise tools and equipments with the best raw material, that is why SGS became one of market leaders in the dental implant industry and nowadays our system is used by thousands of professionals all around the world.

All our implants are made of biocompatible material - medical grade 5 titanium alloy with extraordinary coating. Each our product meet the most stringent international quality standards, inspected with very precise triple quality control. SGS International Ltd. has obtained the CE by the European Notified Body CE 1979, European Directive 93/42/EEC - Annex II, Section 4 and are also certified with the quality standard EN ISO 9001:2008 and ISO 13485:2012 on devices dental-implant. SGS International Ltd. is also registered by NQA quality management system. SGS Medical Devices have been cleared for marketing at the US market as well.

2009 is a milestone in our company's life opening a branch

and afterwards a brand new 2500 sqm site with new sterile packaging, logistics and worldwide distribution centre in European Union - Hungary, Budapest. Situated at the very heart of Europe, having hence excellent conditions for expanding, nowadays we have been providing service for our customers in more than 20 countries in the world. Besides of high quality European products SGS Dental Implant System gives best quality service, guarantees affordable price and takes care of all Partners, always intending to be in close business relationship with them. One of our strengths is the worldwide Distribution Network. We are very proud of our well educated distributors providing high-level professional support to their partners.

Hold in high esteem practical knowledge and education in 2013 we have opened our SGS Medical Centre, where medical educational trainings, implantology courses can be provided for oral surgeons visiting us from different part of the world. Thanks to these trainings, courses doctors have well-founded knowledge and experience in SGS Dental Implant System. They are able to work with qualitative and innovative European dental implant system, moreover company SGS guarantees maximum support, help and fast service.

We have been developing and trust to achieve measureless success with all the desired goals with our partners, as we have

**ALL SOLUTIONS FOR A PERFECT SMILE.**





## Titanium material

All SGS Dental Implants are made from European "bio friendly" medical titanium alloy, grade 5 - Titanium 6AL-4V, (signifying the Titanium alloy containing 6% Aluminium and 4% Vanadium alloy). Titanium's special property of fusing to bone, called osseointegration ("osseo" – bone; "integration" – fusion or joining with), is the biological basis of dental implant success.

When teeth are lost, the bone that supported those teeth is lost too, so placing dental implants stabilizes bone, preventing its loss. Along with replacing lost teeth, implants help maintain the jawbone's shape and density. Dental implants help you eat, chew, smile, talk and look completely natural.



## SGS sterilization procedure

SGS has a strict sterilisation process, undergoing a continuous laboratory control and report manual management. All our implant undergo a clean-room packaging channel and then introduced to gamma radiation. We keep a hard control on the steps our colleagues practise and each dosage of implants is randomly inspected in SGS laboratories.



## Product guarantee

SGS Dental Implant takes responsibility for all of its implants and gives life-time warranty when used in accordance with the supplied instructions for use and the company protocols.



Our implants  
available in

**28**  
countries



*Out of 100 implantations less than two have negative result because of our special smart surface treatment, unique implant design and our precious research.*

## SGS Dental Implants



Dental implants are an effective, safe and excellent solution to the problems resulting from missing teeth, look and feel like your own teeth. That is why in the last 25 years dental implants have changed the face of dentistry.

A dental implant is actually a replacement for the root of tooth, secured in the jawbone and not visible once surgically placed. It is used to secure crowns (the parts of teeth seen in the mouth), bridgework or dentures by a variety of

means. Nowadays good and safe implant is not only a prosthetic, but aesthetic question as well. Extremely important that our implants are made of lightweight, strong and biocompatible titanium. Biocompatible word means not rejected by the body, furthermore we have excellent surface treatment which reduces healing time.



ISO 9001:2008  
ISO 13485:2012

SGS's products are cleared for marketing in the USA.\*

*\*Some products may not be available in the USA.*




## A new microstructured bioactive antibacterial surface for implants!

SGS Dental implements famous SBTC® coating for its dental implants:

SBTC® is a known worldwide type of dental implant coating, having outstanding performances in dental implantation practice.


### Advantages of the SBTC® coating

- + Faster and better healing
- + Complex surface design with significant surface enlargement
- + High hydrophilic reaction with blood
- + Increased primary stability with reduced healing time
- + Active support of bone attachment
- + Higher application security
- + Possible diversification of indications (early loading/immediately loading)
- + Prevention of spontaneous oxidation of the titanium surface through CaP-coating
- + Higher osteoconductivity of the surface
- + Outstanding biocompatibility
- + Thin coating
- + Microcrystalline structure, large open surface
- + High solubility and controlled resorption area
- + Complete coverage of porous surfaces and complex implant geometries
- + Microporosity with high capillary effect on body fluids






SEM magnificationX25: clean uniform surface with no contaminations




SEM magnificationX2000: clear uniform crystalline structure of SBTC® type




EDS spectrum: Calcium-Phosphorus-Oxygen presence adequate to chemical composition of SBTC® coating

### SBTC coated dental implants of SGS Dental have all substantial features of the SBTC type Ca-P coating:


- + Clean uncontaminated uniform surface
- + Unique SBTC crystalline structure of Ca-P brushite particles' coating on dental implants surface
- + Ca-P-O chemical composition of the coating layer approving its SBTC origin



Osteocalcin, 14 days



Osteocalcin, 30 days

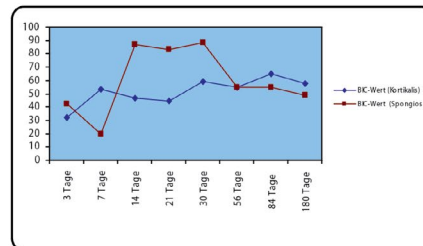


### Summary

Implants with SBTC surface showed a significant increase in Bone-Implant-Contact (BIC) in the spongiosa area between 14 and 30 days. In the further course within the SBTC remodeling BIC-Data in the range between 40-60% arises, which conforms to the data described in the literature. After 30 days the osteocalcin –expression too was significant increased by the implants with the SBTC-surface.

### Description of the biological properties of the coating


The SBTC® coating is a bioactive calcium phosphate coating that supports the adhesion of osteoblast cells and simultaneously promotes their proliferation. The cells demonstrate good adhesion and a typical morphology for osteoblast. Under the scanning electron microscope the integration of the cells into the material is clearly visible.



Bone tissue formation on SBTC®



Human osteoblasts on SBTC®




Osteoblast MG 63 cells on SBTC®

The SBTC® coating consists of two calcium phosphate phases with different solubilities. The more easily soluble outer calcium phosphate phase, brushite, occurs in natural bone as an intermediate stage during calcification of new bone tissue. When brushite dissolves, calcium and phosphate ions are released in a high concentration, and they are the cause of fast contact osteogenesis and the high mineralization rate. Brushite is therefore in a position to stimulate the body to its own bone synthesis in the short term, and to accelerate the osseointegration of the implants, particularly in the primary phase. The inner calcium phosphate phase, the fine crystalline hydroxyapatite, is resorbed more slowly and releases ions that promote the formation of new bone over a longer period. The SBTC® coating is fully resorbed over a period of 6-12 weeks after implant placement and is simultaneously replaced by newly formed bone tissue, with the ultimate result that an optimum bond between bone and implant has been formed in place of the coating. This osteoinductive property combined with the controlled resorption is the primary advantage of the bioactive SBTC® coating.

## Differentiation of cells in vitro under the influence of SBTC®


The influence of the SBTC® coating on cell differentiation was examined by a Co culture of the hFOB1.19 osteoblast cell line with TPS/SBTC®-coated platelets of TiAl6V4. The osteoblast-specific collagen synthesis was analyzed at various points during incubation. The result after 6 days and after 10 days of incubation showed increased collagen synthesis on the SBTC®-coated test bodies.

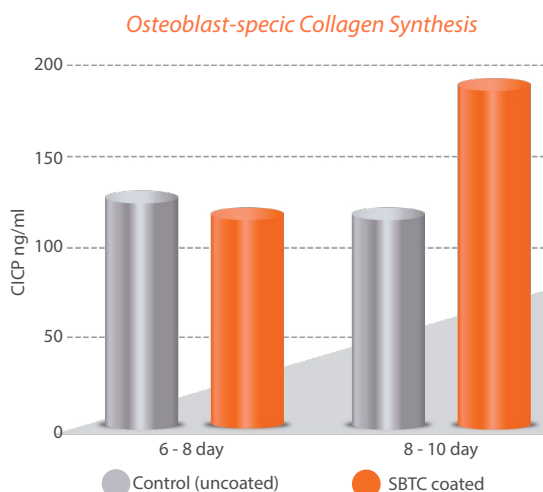

## Mineralization in vitro under the influence of SBTC®

The influence of the SBTC® coating in the mineralization was analyzed by incubating test bodies coated with SBTC® in cell culture medium (DMEM) for seven days. The extract was added to a confluent cell layer and the mineralization was confirmed by van Kossa staining. With


van Kossa staining mineralized areas are stained black. Figure 10 shows the difference between the control medium and the SBTC® extract. While a slight mineralization could be confirmed in the cells in the control medium, strong mineralization could be confirmed with the SBTC® extract. This indicates that the calcium-phosphate phases in the SBTC® coating stimulate the mineralization of human osteoblasts.

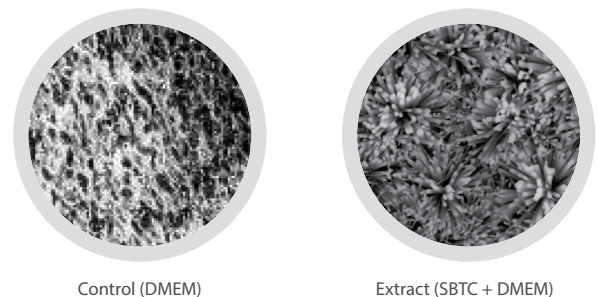

## Immunological reactivity in vitro under the influence of SBTC®


The effect of the SBTC® coating on the immunological reactivity was analyzed by the release of interleukin 1 $\beta$  (IL-1 $\beta$ ). IL-1 $\beta$  is a typical enzyme, which is released during the early inflammation phase and influences bone resorption. The test was conducted with monocytes and macrophages of the mouse cell line J-774A.1, which were cultured either with control bodies (TiAl6V4/TPS) or with SBTC®-coated test bodies. After three days of culture the expression of IL-1 $\beta$  was analyzed. The SBTC®-coated samples in comparison with the uncoated control demonstrated a significant reduction of IL-1 $\beta$  release. This means that the coating with SBTC® triggers virtually no inflammation parameters, and as a result can be classified as very biocompatible.



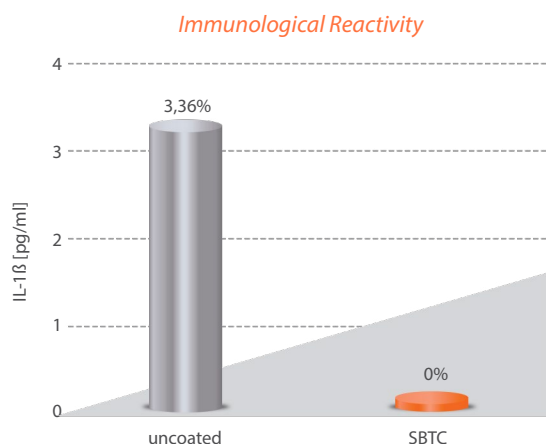


## Analysis of the protein adsorption in vitro under the influence of SBTC®

The protein adsorption or immobilization of proteins at the implant surface is, clinically viewed, an important step in the osseointegration of implants. To determine the protein adsorption SBTC®-coated test bodies and uncoated control bodies were incubated in fetal calf serum for several hours. After various incubation times (1h and 4h) the protein adsorption on the different test bodies was analyzed. As can be seen in the next diagram, the coating with SBTC® significantly increased protein adsorption in comparison with the uncoated test bodies.

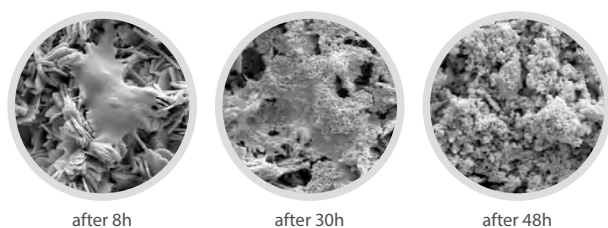

## Conclusion

The electrochemical deposition of the SBTC® coating ensures complete coverage of porous implant surfaces and complex implant shapes. Unlike the highly crystalline, poorly soluble HA coatings in the plasma-spray process, the electrolytic coating technology yields a fine crystalline structure. The process eliminates hard particles and delamination of the coating. The almost vertical adjacent calcium phosphate crystals and the associated large open surface give the implant surface a high capillary effect on blood and ensure adsorption and immobilization of relevant growth factors. The controlled process of coating degradation correlates with simultaneous formation of new bone, which takes place immediately on the porous

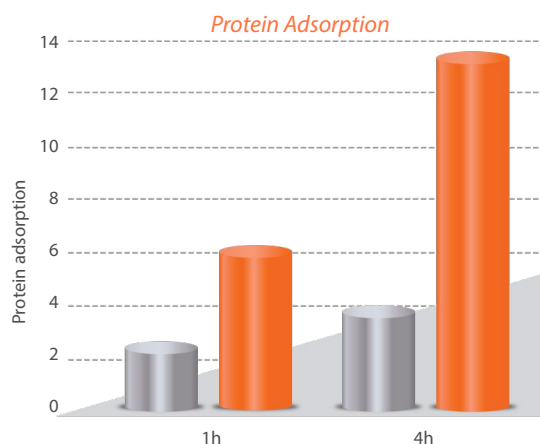

## In vitro precipitation tests with SBTC®

In in vitro tests SBTC®-coated test bodies were colonized with osteoblast cells of the cell line MG-63 and cultured in cell culture medium for 48 hours. After 30 hours in the culture a fine crystalline precipitation could be observed on the coating surface. The cells on the SBTC® surface were partially covered with the precipitate. As could be shown by EDX analyses, the precipitate was also a calcium-phosphate compound. After 48 hours the cells were completely covered. Visualization of the actin cytoskeleton of the bone cells showed that the morphology of the cells remained virtually unchanged during the reprecipitation.


Comparison test bodies that were coated with hydroxyapatite only did not show this behavior. The in vitro results lead to the conclusion that there is a precipitation on the surface during dissolution of the coating, in particular because of the presence of the easily dissolved brushite phase. It can be concluded that these processes also take place in the body and there is therefore a calcium phosphate phase directly on the SBTC® surface in the body.

implant surface. This results in increased bone deposition and the option of early mechanical loading. This gives the SBTC® coating improved osseointegration and it can be considered a further development of the plasma-sprayed HA coatings, which retains the good bioactive properties and eliminates the remaining potential long-term risks. The unique two-layer design of the SBTC® coating is perfectly adapted to the healing process of the bone. The SBTC® coating is resorbed within 6-12 weeks by a controlled mechanism and completely replaced by new bone tissue. This means that the coating only remains in place until the implant is healed in position and has formed a fixed connection between the implant surface and the surrounding bone tissue.




## Animal-experimental tests

Animal tests were conducted on the minipig animal model at the laboratory for biomechanics and experimental orthopedics of the University of Mannheim to investigate the formation of new bone with SBTC®-coated implants. SBTC®-coated titanium pins were press-fitted into 21 animals. The follow-up period was 12 weeks. The results of the study show significantly increased bone deposition with the SBTC®-coated implants and subsequently significantly better anchorage of the implant in the early postoperative phase.

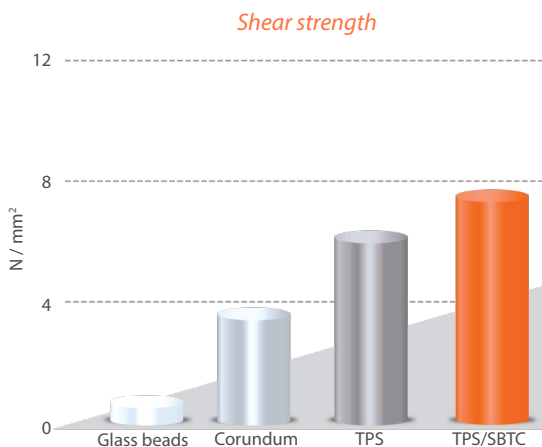

*Shear strength of different surfaces after implant placement*

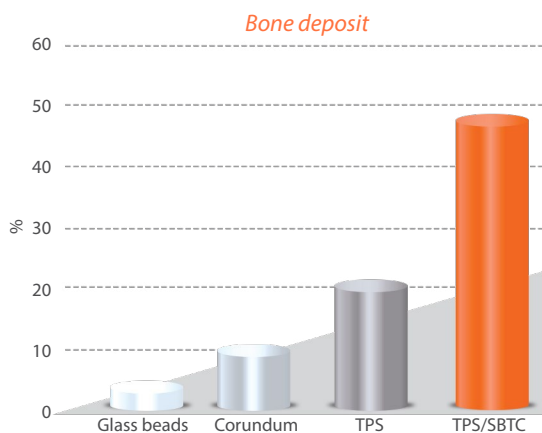


*Bone deposition of different surfaces after implant placement*

## Effectiveness of the SBTC® coating in the animal model

In this animal experiment the osseointegration of test implants with the TPS surface was compared to

implants with the TPS/SBTC® coating. The implants were placed in the maxilla of domestic pigs (*Sus scrofa domestica*). The direct bone contact in both test groups was analyzed six weeks after implant placement. The results of the test show significant differences in the bone contact between the two groups. The average bone contact for the control implants was 49.8%, while a direct bone contact of 73% was measured for the SBTC®-coated implants.

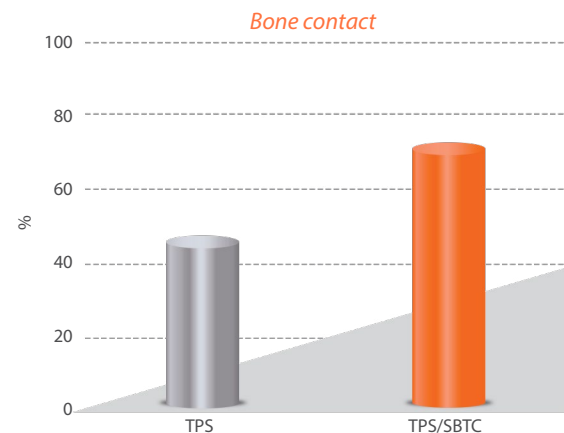


*Bone contact values of the different surfaces*

A high proportion of bone was found, particularly between the threads of implant, and a clear osteoconductive effect as a result of the presence of the SBTC® coating. The SBTC® coating was almost completely resorbed during the study period of six weeks.

No reactions to foreign bodies were detected, which is another indication of the very good biocompatibility of the surface.


## Study of SBTC®-coated implants in the canine model

The goal of the study was to determine the effect of the SBTC® coating on osseointegration over extended periods with immediate loading. Implants with different surfaces were placed in the mandibles of dogs (beagles). The surfaces of the implants consisted of a TPS surface, a plasma-sprayed HA surface and a TPS+SBTC® surface. The implants were immediately restored with a crown and placed under immediate loading. The crowns were not in contact with neighboring teeth or other implants. The follow-up period was seven months. The results of the trial show that the SBTC® coating was fully resorbed after seven months and had been replaced by newly formed bone tissue.

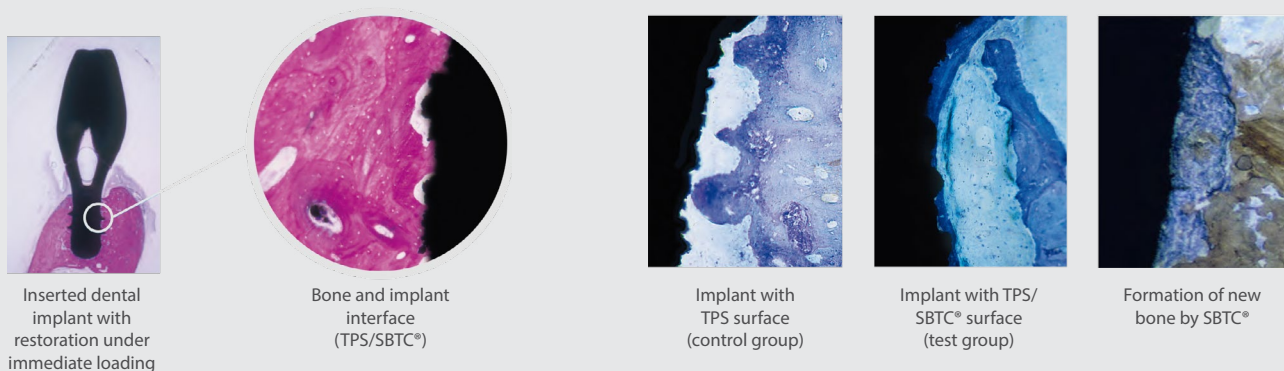

In contrast, fragmentation of the coating and unhomogenous resorption could be observed with the HA-plasma-sprayed surface. Isolated HA particles were also found.

The SBTC®-coated implants also demonstrated the highest bone deposition density. However, the difference between the surfaces decreased with increasing implant placement time

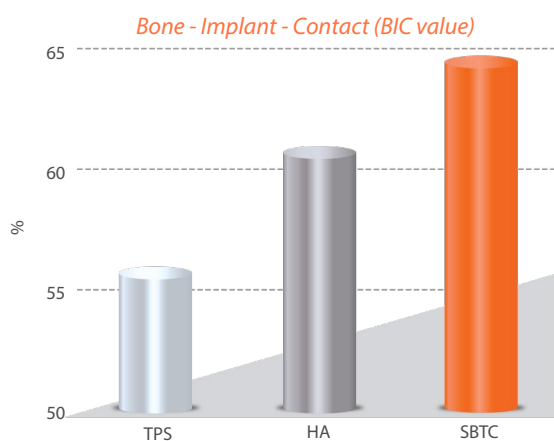

## Effect of differently applied CaP coatings on the osseointegration of implants

The effect of differently applied CaP coatings on the osseointegration of titanium implants was investigated in the animal model. The study included three groups with different surface modifications. Group 1 had a rough surface, group 2 had a biomimetic CaP coating and group 3 had an electrochemically deposited CaP coating. A total of 36 implants were placed in the tibias of 18 rabbits. The study period was 6 and 12 weeks. The influence of the different implant surfaces on the osseointegration was analyzed. REM images of the different surfaces were prepared and analyzed. On the biomimetically deposited CaP coating the crystals were arranged as

flakes, while the electrochemically deposited CaP coating had rod-shaped crystals with a hexagonal cross-section.

The histological analyses after six weeks showed bone growth along the surfaces. On the electrochemically deposited CaP coating the significantly largest BIC values were measured and compared with the rough and biomimetically deposited CaP surfaces. The study showed that the electrochemically deposited CaP coating appears to improve osseointegration, and as a result can ensure a long-term and stable fixation of the implants in the bone tissue.

## Clinical results

A multicentric study, which included universities and private practices, investigated PITT-EASY implants (Oraltronic) with SBTC® coating (FBR surface on a porous TPS surface). The implants were placed in the maxilla and the mandible. The study protocol included immediate loading. A total of 156 implants were placed in 62 patients, with 40 implants placed in fresh extraction alveoli. After 6 months 8 implants in 6 patients had been lost, 6 in the mandible and 2 the maxilla. After 6 months under load 98% of the implants were osseointegrated and functional.




# SGS DENTAL PACKAGING SYSTEM



Remove the implant from the plastic holder:



After you removed the implant from the plastic holder:

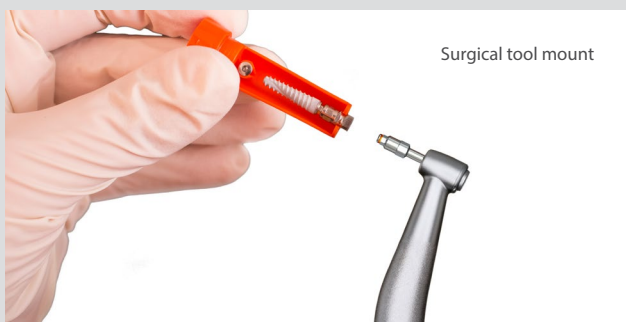




## Sign Index

<b>REF</b>	Catalogue number
<b>LOT</b>	Batch number
	Manufacturer
	Use by date
	Do not use if package is opened or damaged
	Do not re-use
	Do not re-sterilize
	Attention, see instruction for use
<b>RxOnly</b>	Prescription use only
<b>STERILE R</b>	Sterilized
<b>CE</b>	Conformity marking

Color codes:



With color codes it is easy to identify the implant's diameter.

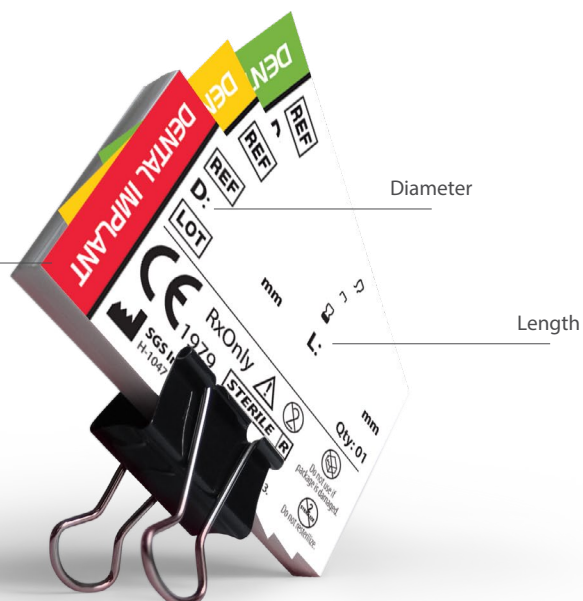

Manually / ratchet / handle





## NARROW CONICAL PLATFORM



## CONICAL PLATFORM



## ONE- PIECE



Color  
Code

## P7N

Dental Implant

High pitch, slightly aggressive implant with special conical connection. It is suitable for immediate loading.

Available sizes:  
Ø 3.0, Ø 3.2

Color  
CodeCOMING  
SOON!

## P1D

Dental Implant

Short pitch, slightly aggressive implant, which is specially for hard bone (mandibula), with platform shift and conical connection.

Available sizes:  
Ø 3.5, Ø 3.75, Ø 4.2, Ø 5, Ø 6



## P7D

Dental Implant

High pitch, slightly aggressive implant, which is suitable for immediate loading. It is characterized by self tapping screw with platform shifting and conical connection.

Available sizes:  
Ø 3.5, Ø 3.75, Ø 4.2, Ø 4.5, Ø 5, Ø 6

Color  
Code

## P7S

Dental Implant

One-piece implant. It has the same parameters like P7. The abutment is integrated.

Available sizes:  
Ø 3.0, Ø 3.2, Ø 3.75, Ø 4.2, Ø 5, Ø 6



## P9S

Dental Implant

One-piece esthetic implant.


Available sizes:  
Ø 2.4, Ø 3.0, Ø 3.2









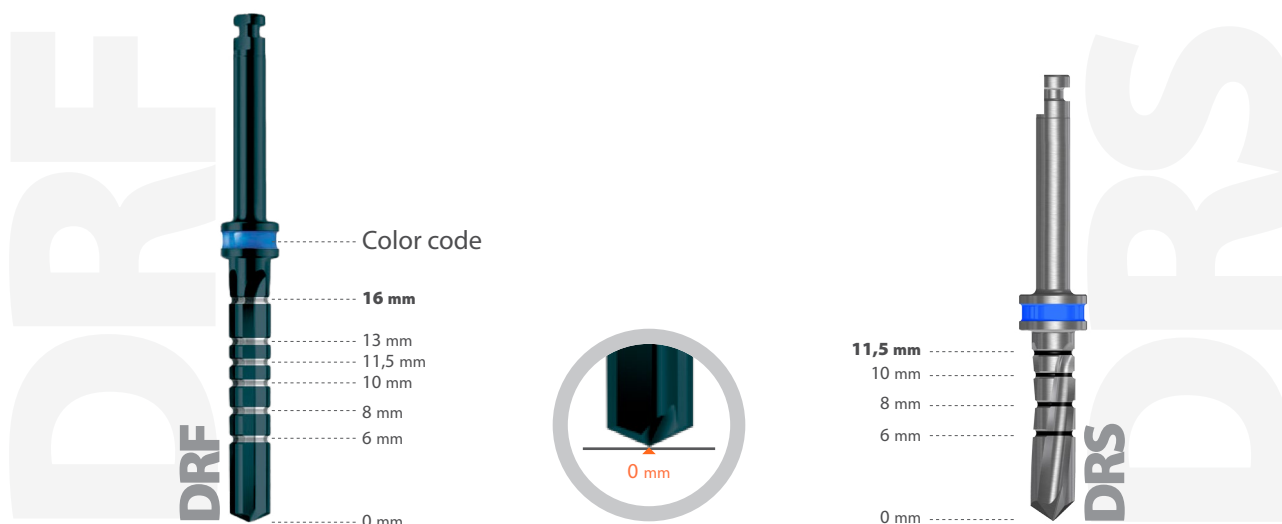




























Straight Drills								
	<b>DRF</b>							
Diameter	Ø 2.0	Ø 2.5	Ø 2.8	Ø 3.2	Ø 3.7	Ø 4.0	Ø 4.5	Ø 5.5
Product code	DR - 2.0	DRF - 2.5	DRF - 2.8	DRF - 3.2	DRF - 3.7	DRF - 4.0	DRF - 4.5	DRF - 5.5
Ref. number	C992	C9025	C9028	C9032	C9037	C9040	C9045	C9055
Material	Stainless steel							
Information	Biocompatible diamond link carbon coating							





Conical Drills								
	<b>DRC</b>							
Diameter	Ø 2.0	Ø 2.5	Ø 2.8	Ø 3.2	Ø 3.7	Ø 4.0	Ø 4.5	Ø 5.5
Product code	DR - 2.0	DRC - 2.5	DRC - 2.8	DRC - 3.2	DRC - 3.7	DRC - 4.0	DRC - 4.5	DRC - 5.5
Ref. number	C992	C9125	C9128	C9132	C9137	C9140	C9145	C9155
Material	Stainless steel							

Short Drills								
	<b>DRS</b>							
Diameter	Ø 2.0	Ø 2.5	Ø 2.8	Ø 3.2	Ø 3.7	Ø 4.0	Ø 4.5	Ø 5.5
Product code	DRS - 2.0	DRS - 2.5	DRS - 2.8	DRS - 3.2	DRS - 3.7	DRS - 4.0	DRS - 4.5	DRS - 5.5
Ref. number	C1002	C10025	C10028	C10032	C10037	C10040	C10045	C10055
Material	Stainless steel							





Stopper Drills							
6 mm							
Diameter	Ø 2.0	Ø 2.5	Ø 2.8	Ø 3.2	Ø 3.7	Ø 4.0	Ø 4.5
Ref. number	C10126	C101256	C101286	C101326	C101376	C101406	C101456
8 mm							
Diameter	Ø 2.0	Ø 2.5	Ø 2.8	Ø 3.2	Ø 3.7	Ø 4.0	Ø 4.5
Ref. number	C10128	C101258	C101288	C101328	C101378	C101408	C101458
10 mm							
Diameter	Ø 2.0	Ø 2.5	Ø 2.8	Ø 3.2	Ø 3.7	Ø 4.0	Ø 4.5
Ref. number	C101210	C1012510	C1012810	C1013210	C1013710	C1014010	C1014510
11.5 mm							
Diameter	Ø 2.0	Ø 2.5	Ø 2.8	Ø 3.2	Ø 3.7	Ø 4.0	Ø 4.5
Ref. number	C101211	C1012511	C1012811	C1013211	C1013711	C1014011	C1014511
13 mm							
Diameter	Ø 2.0	Ø 2.5	Ø 2.8	Ø 3.2	Ø 3.7	Ø 4.0	Ø 4.5
Ref. number	C101213	C1012513	C1012813	C1013213	C1013713	C1014013	C1014513


Other Drills			 <div>TREPHINE DRILL 4 mm</div> <div>D1 D2</div>	 <div>TREPHINE DRILL 5 mm</div>
Product code	DR - 1.5	DR-E	DR-T 4/5	DR-T 5/6
Ref. number	C9215	C93	C9445	C9456
Dimensions			D1: 5 mm   D2: 4 mm	D1: 6 mm   D2: 5 mm
Description	Marker drill	Drilling extension	Trepine drill	
Material	Stainless steel			





- |   |   |  |  |
|---|---|--|--|
| 1<br><br>K5 - 9<br>driver<br>Ref. num.: B59   | 6<br><br>K5D - 15<br>driver<br>Ref. num.: DB515   | 11<br><br>K8N - 23<br>driver<br>Ref. num.: NB823 | 16<br><br>K1 - 15<br>driver<br>Ref. num.: B115           |
| 2<br><br>K5 - 15<br>driver<br>Ref. num.: B515 | 7<br><br>K8D - 23<br>driver<br>Ref. num.: DB823   | 12<br><br>K8N - 28<br>driver<br>Ref. num.: NB828 | 17<br><br>K9 - 23<br>adaptor<br>Ref. num.: B923          |
| 3<br><br>K8 - 23<br>driver<br>Ref. num.: B823 | 8<br><br>K8D - 28<br>adaptor<br>Ref. num.: DB828  | 13<br><br>K2 - 9<br>driver<br>Ref. num.: B29     | 18<br><br>K5 - 0<br>adaptor<br>Ref. num.: B50            |
| 4<br><br>K8 - 28<br>driver<br>Ref. num.: B828 | 9<br><br>K5N - 9<br>adaptor<br>Ref. num.: NB59    | 14<br><br>K2 - 15<br>driver<br>Ref. num.: B215   | 19<br><br>Parallel<br>pin<br>Ref. num.:<br>C8920 / C8927 |
| 5<br><br>K5D - 9<br>driver<br>Ref. num.: DB59 | 10<br><br>K5N - 15<br>adaptor<br>Ref. num.: NB515 | 15<br><br>K1 - 9<br>driver<br>Ref. num.: B19     | 20<br><br>R8T<br>ratchet<br>Ref. num.: C98               |

## SK-F

with  
straight drills  
Ref. num.: 10290

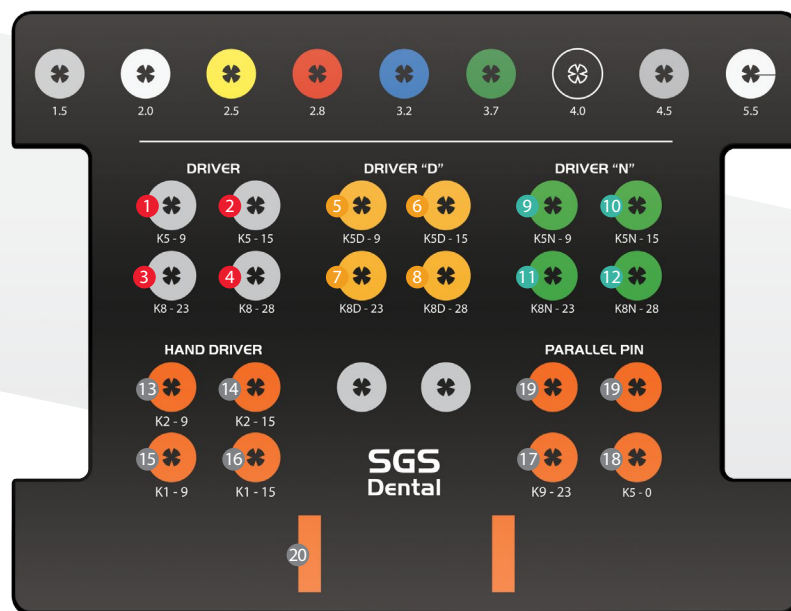

- |                                     |                                    |                                      |                                      |                                      |                                      |                                      |                                      |                                      |
|-------------------------------------|------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| <br>DR - 1.5<br>Ref. num.:<br>C9215 | <br>DR - 2.0<br>Ref. num.:<br>C992 | <br>DRF - 2.5<br>Ref. num.:<br>C9025 | <br>DRF - 2.8<br>Ref. num.:<br>C9028 | <br>DRF - 3.2<br>Ref. num.:<br>C9032 | <br>DRF - 3.7<br>Ref. num.:<br>C9037 | <br>DRF - 4.0<br>Ref. num.:<br>C9040 | <br>DRF - 4.5<br>Ref. num.:<br>C9045 | <br>DRF - 5.5<br>Ref. num.:<br>C9055 |
|-------------------------------------|------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|

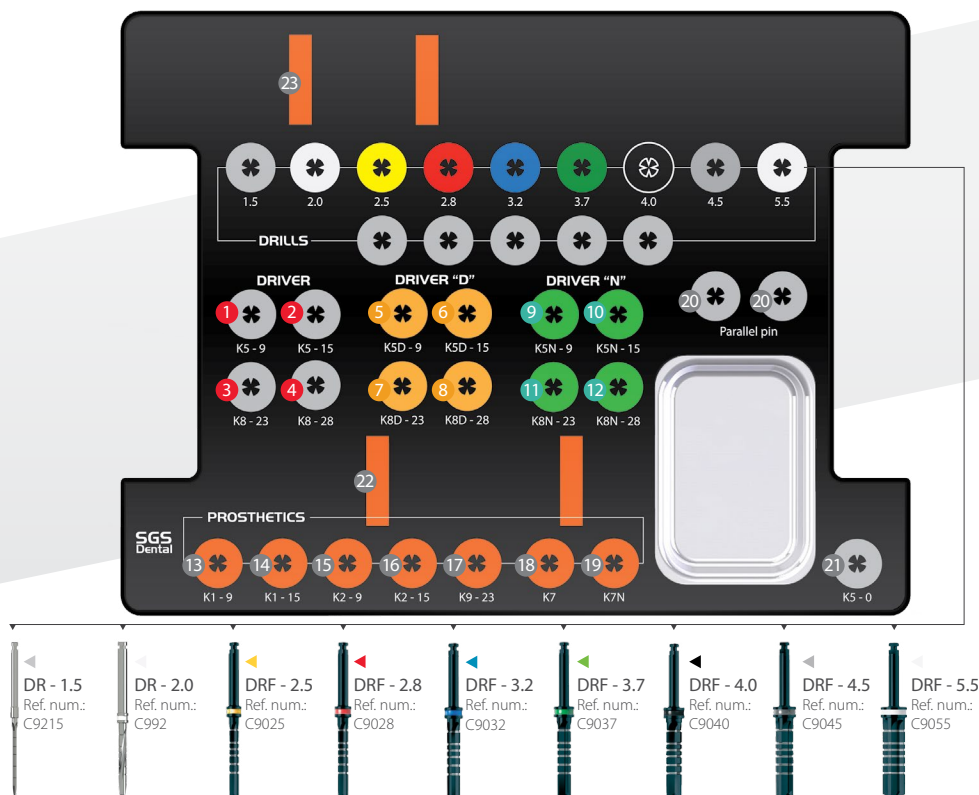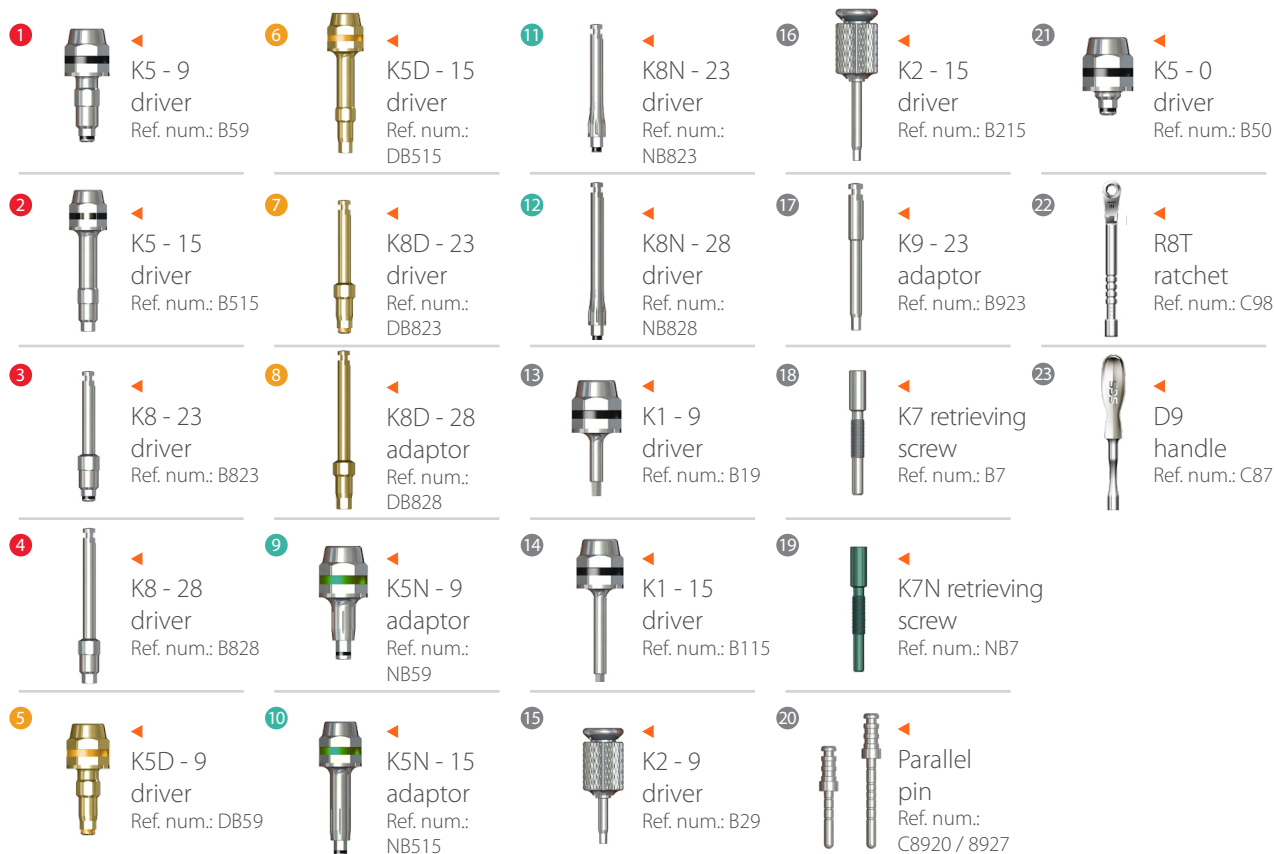








- |   |   |  |  |
|---|---|--|--|
| 1<br><br>K5 - 9<br>driver<br>Ref. num.: B59   | 6<br><br>K5D - 15<br>driver<br>Ref. num.: DB515   | 11<br><br>K8N - 23<br>driver<br>Ref. num.: NB823 | 16<br><br>K1 - 15<br>driver<br>Ref. num.: B115           |
| 2<br><br>K5 - 15<br>driver<br>Ref. num.: B515 | 7<br><br>K8D - 23<br>driver<br>Ref. num.: DB823   | 12<br><br>K8N - 28<br>driver<br>Ref. num.: NB828 | 17<br><br>K9 - 23<br>adaptor<br>Ref. num.: B923          |
| 3<br><br>K8 - 23<br>driver<br>Ref. num.: B823 | 8<br><br>K8D - 28<br>adaptor<br>Ref. num.: DB828  | 13<br><br>K2 - 9<br>driver<br>Ref. num.: B29     | 18<br><br>K5 - 0<br>adaptor<br>Ref. num.: B50            |
| 4<br><br>K8 - 28<br>driver<br>Ref. num.: B828 | 9<br><br>K5N - 9<br>adaptor<br>Ref. num.: NB59    | 14<br><br>K2 - 15<br>driver<br>Ref. num.: B215   | 19<br><br>Parallel<br>pin<br>Ref. num.:<br>C8920 / C8927 |
| 5<br><br>K5D - 9<br>driver<br>Ref. num.: DB59 | 10<br><br>K5N - 15<br>adaptor<br>Ref. num.: NB515 | 15<br><br>K1 - 9<br>driver<br>Ref. num.: B19     | 20<br><br>R8T<br>ratchet<br>Ref. num.: C98               |

## SK-C



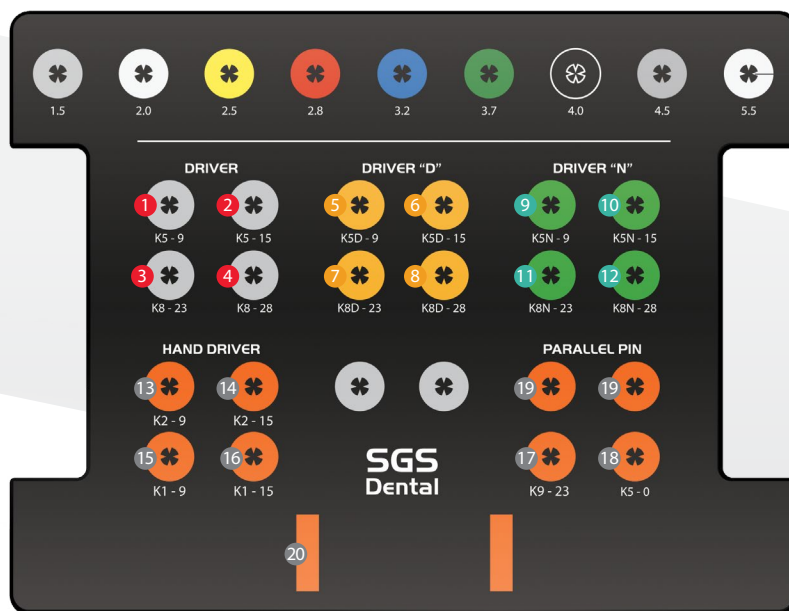



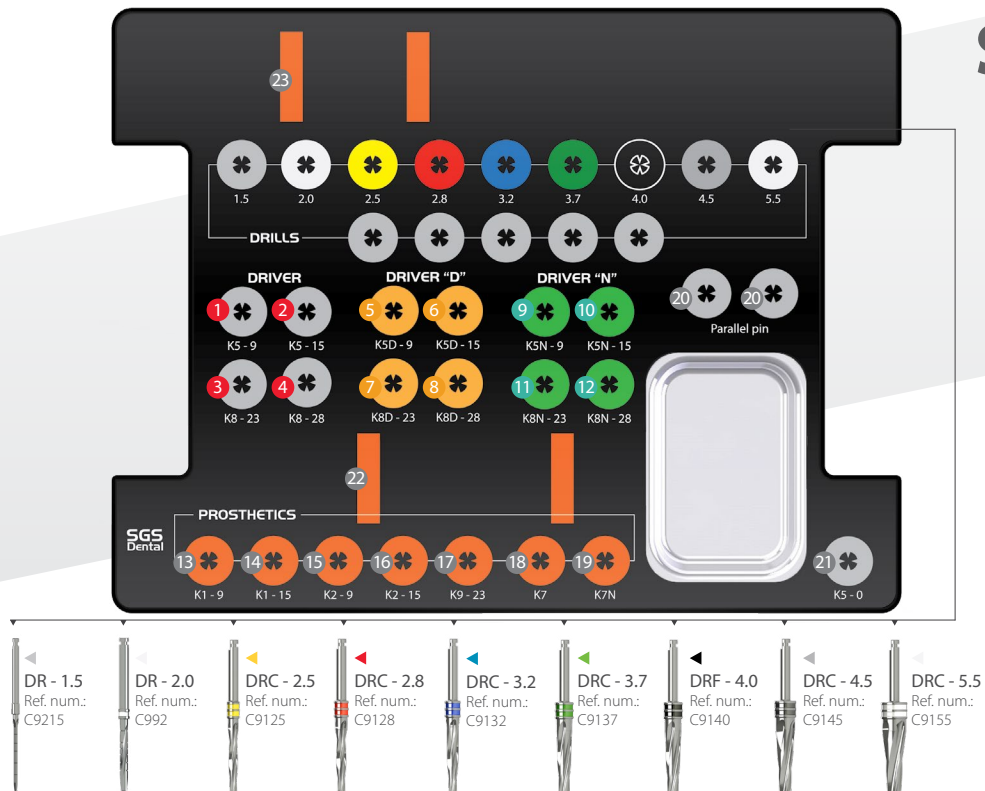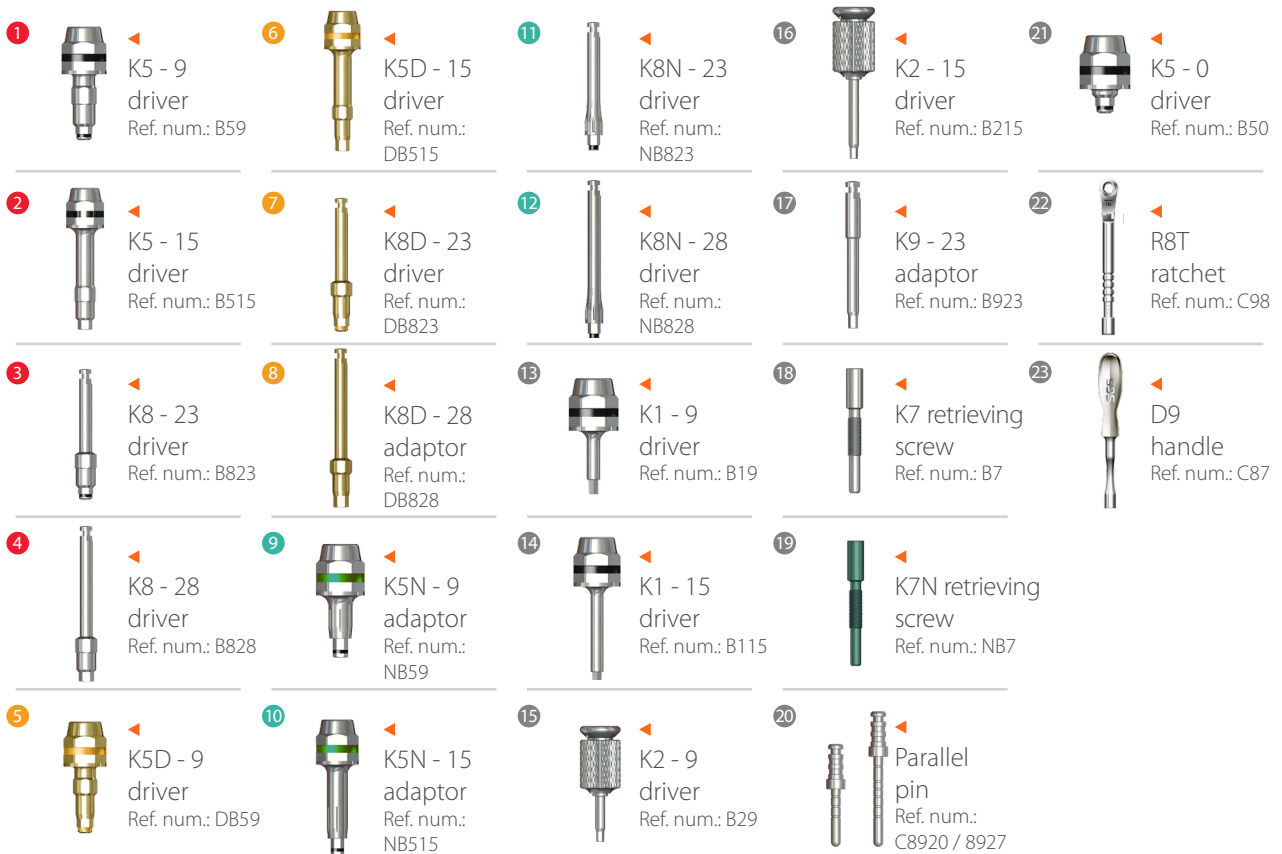




























with  
conical drills  
Ref. num.: 10291



- |                                     |                                    |                                      |                                      |                                      |                                      |                                      |                                      |                                      |
|-------------------------------------|------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|
| <br>DR - 1.5<br>Ref. num.:<br>C9215 | <br>DR - 2.0<br>Ref. num.:<br>C992 | <br>DRC - 2.5<br>Ref. num.:<br>C9125 | <br>DRC - 2.8<br>Ref. num.:<br>C9128 | <br>DRC - 3.2<br>Ref. num.:<br>C9132 | <br>DRC - 3.7<br>Ref. num.:<br>C9137 | <br>DRC - 4.0<br>Ref. num.:<br>C9140 | <br>DRC - 4.5<br>Ref. num.:<br>C9145 | <br>DRC - 5.5<br>Ref. num.:<br>C9155 |
|-------------------------------------|------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|--------------------------------------|








































 L6 Ø 2.0 Ref. num.: C10126	 L6 Ø 2.5 Ref. num.: C101256	 L6 Ø 2.8 Ref. num.: C101286	 L6 Ø 3.2 Ref. num.: C101326	 L6 Ø 3.7 Ref. num.: C101376	 L6 Ø 4.0 Ref. num.: C101406	 L6 Ø 4.5 Ref. num.: C101456
 L8 Ø 2.0 Ref. num.: C10128	 L8 Ø 2.5 Ref. num.: C101258	 L8 Ø 2.8 Ref. num.: C101288	 L8 Ø 3.2 Ref. num.: C101328	 L8 Ø 3.7 Ref. num.: C101378	 L8 Ø 4.0 Ref. num.: C101408	 L8 Ø 4.5 Ref. num.: C101458
 L10 Ø 2.0 Ref. num.: C101210	 L10 Ø 2.5 Ref. num.: C1012510	 L10 Ø 2.8 Ref. num.: C1012810	 L10 Ø 3.2 Ref. num.: C1013210	 L10 Ø 3.7 Ref. num.: C1013710	 L10 Ø 4.0 Ref. num.: C1014010	 L10 Ø 4.5 Ref. num.: C1014510
 L11,5 Ø 2.0 Ref. num.: C101211	 L11,5 Ø 2.5 Ref. num.: C1012511	 L11,5 Ø 2.8 Ref. num.: C1012811	 L11,5 Ø 3.2 Ref. num.: C1013211	 L11,5 Ø 3.7 Ref. num.: C1013711	 L11,5 Ø 4.0 Ref. num.: C1014011	 L11,5 Ø 4.5 Ref. num.: C1014511
 L13 Ø 2.0 Ref. num.: C101213	 L13 Ø 2.5 Ref. num.: C1012513	 L13 Ø 2.8 Ref. num.: C1012813	 L13 Ø 3.2 Ref. num.: C1013213	 L13 Ø 3.7 Ref. num.: C1013713	 L13 Ø 4.0 Ref. num.: C1014013	 L13 Ø 4.5 Ref. num.: C1014513

## SKD Stopper drills kit

Ref. num.: 104101






 L6 Ø 2.0 Ref. num.: C10126	 L6 Ø 2.5 Ref. num.: C105256	 L6 Ø 2.8 Ref. num.: C105286	 L6 Ø 3.2 Ref. num.: C105326	 L6 Ø 3.7 Ref. num.: C105376	 L6 Ø 4.0 Ref. num.: C105406	 L6 Ø 4.5 Ref. num.: C105456
 L8 Ø 2.0 Ref. num.: C10128	 L8 Ø 2.5 Ref. num.: C105258	 L8 Ø 2.8 Ref. num.: C105288	 L8 Ø 3.2 Ref. num.: C105328	 L8 Ø 3.7 Ref. num.: C105378	 L8 Ø 4.0 Ref. num.: C105408	 L8 Ø 4.5 Ref. num.: C105458
 L10 Ø 2.0 Ref. num.: C101210	 L10 Ø 2.5 Ref. num.: C1052510	 L10 Ø 2.8 Ref. num.: C1052810	 L10 Ø 3.2 Ref. num.: C1053210	 L10 Ø 3.7 Ref. num.: C1053710	 L10 Ø 4.0 Ref. num.: C1054010	 L10 Ø 4.5 Ref. num.: C1054510
 L11,5 Ø 2.0 Ref. num.: C101211	 L11,5 Ø 2.5 Ref. num.: C1052511	 L11,5 Ø 2.8 Ref. num.: C1052811	 L11,5 Ø 3.2 Ref. num.: C1053211	 L11,5 Ø 3.7 Ref. num.: C1053711	 L11,5 Ø 4.0 Ref. num.: C1054011	 L11,5 Ø 4.5 Ref. num.: C1054511
 L13 Ø 2.0 Ref. num.: C101213	 L13 Ø 2.5 Ref. num.: C1052513	 L13 Ø 2.8 Ref. num.: C1052813	 L13 Ø 3.2 Ref. num.: C1053213	 L13 Ø 3.7 Ref. num.: C1053713	 L13 Ø 4.0 Ref. num.: C1054013	 L13 Ø 4.5 Ref. num.: C1054513



**SKD-C**  
Conical stopper  
drills kit  
Ref. num.: 104105




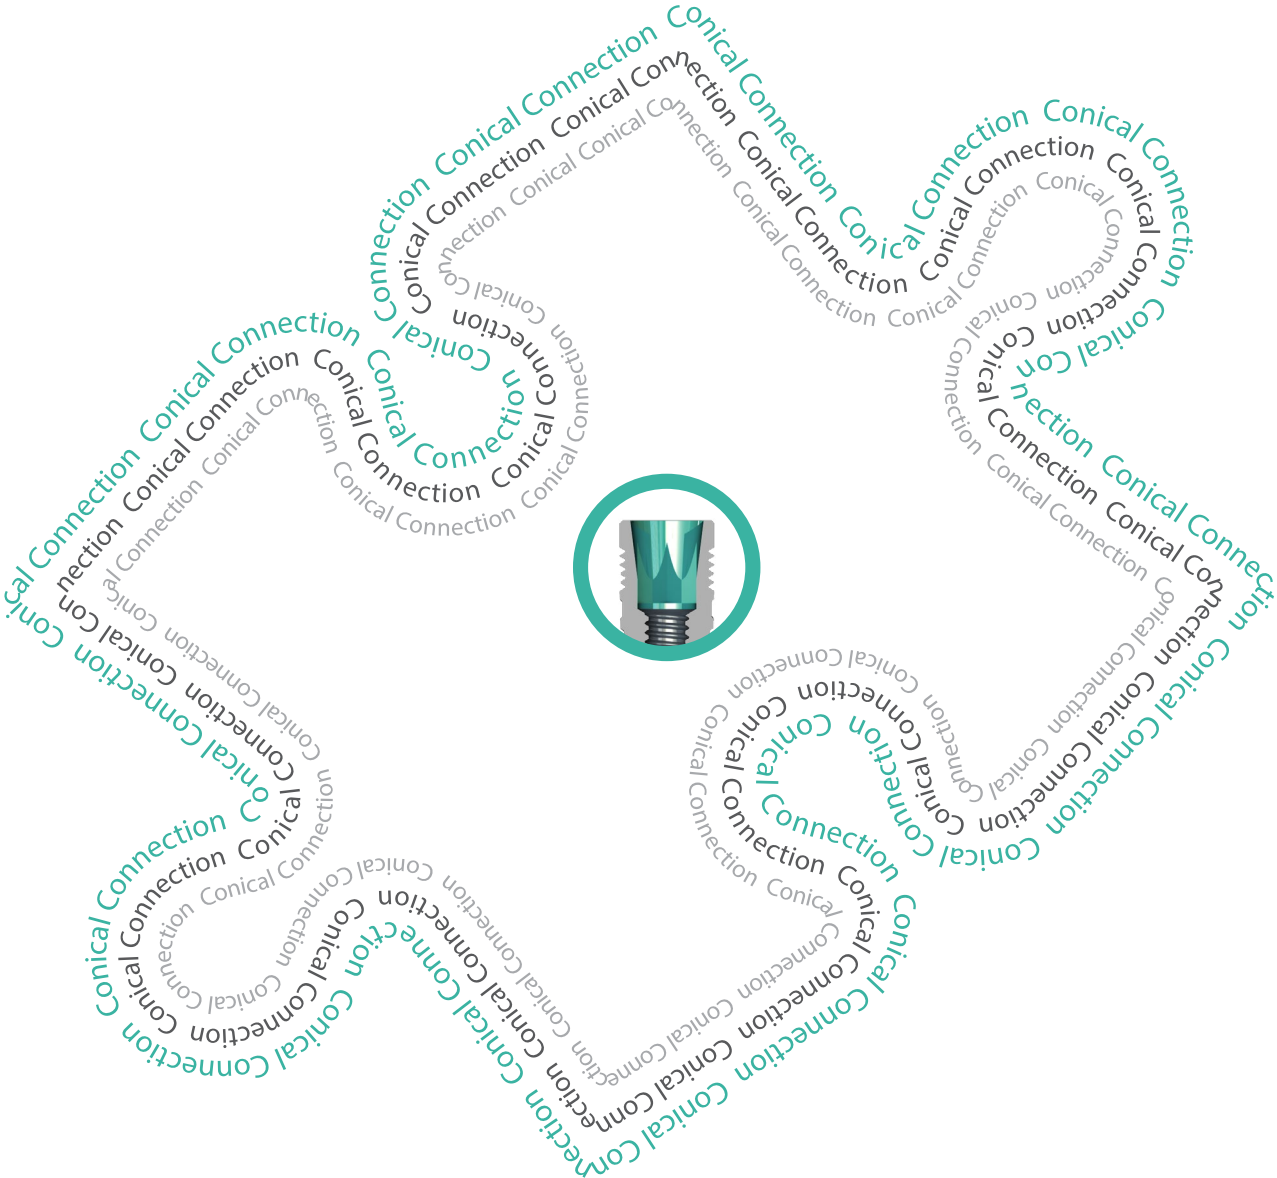







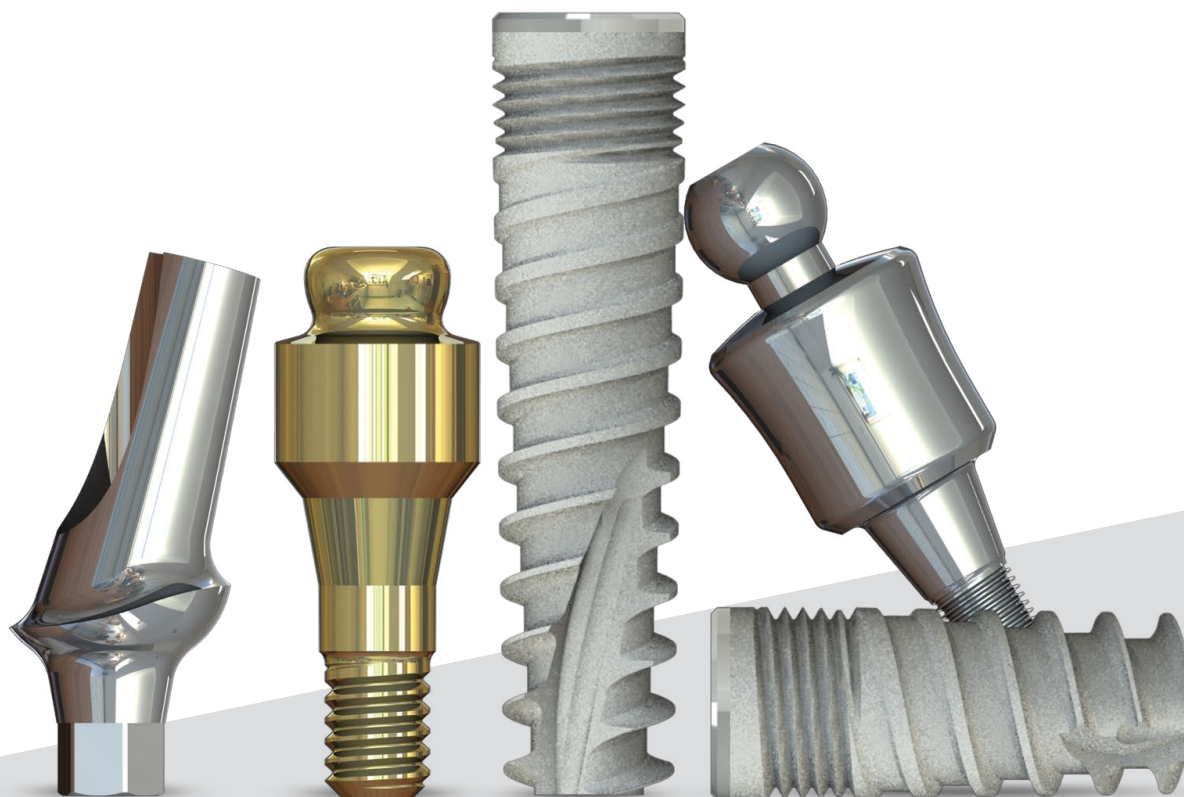




## NARROW CONICAL PLATFORM



**3**

				
Length	10 mm	11,5 mm	13 mm	16 mm
Ref. number	N04310	N04311	N04313	N04316

**3,2**


					
Length	8 mm	10 mm	11,5 mm	13 mm	16 mm
Ref. number	N04328	N043210	N043211	N043213	N043216



PaN  
Implant carrier included



PbN  
Cover screw included

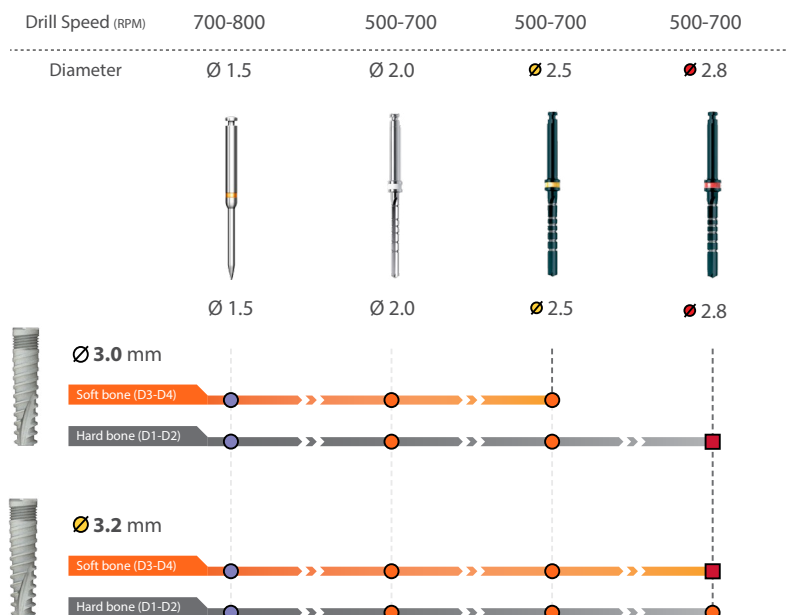

- Marker drill - to be used to make only a mark
- Throughout entire implant's length
- Drill only through the cortical bone, should not be used to full depth.  
If the cortical bone is hard (D1), you may use this drill as a countersink.

An additional 0,8 - 1,0 mm must be added to the length of the drill to account for the angled cutting up.  
Procedure recommended by SGS cannot replace the judgment and the experience of the surgeon!










## Instrument tools and drivers









Instrument tools and drivers

					
Product code	K5 - 0 mm	K5N - 2.1, 9 mm	K5N - 2.1, 15 mm	K8N - 2.1, 23 mm	K8N - 2.1, 28 mm
Ref. number	B50	NB59	NB515	NB823	NB828
Length	0 mm	9 mm	15 mm	23 mm	28 mm
Description	Driver for implants			Adaptor for implants	
Material	Stainless steel				

## Prosthetic tools for the abutments


							
Product code	K1 - 9 mm	K1 - 15 mm	K2 - 9 mm	K2 - 15 mm	K9 - 23 mm	DG	K7N
Ref. number	B19	B115	B29	B215	B923	C125	NB7
Length	9 mm	15 mm	9 mm	15 mm	23 mm		18 mm
Description	Driver for abutments		Hand driver for abutments		Adaptor for abutments	Depth checker	Retrieval screw
Material	Stainless steel					Titanium	

## Implantology tools

								
Product code	K3D/K3M	D9	D17	R8	R8T	M+	DP	K10
Ref. number	B30001/B30002	C87	C88	C97	C98	C96	C8920/C8927	B0
Description	Adaptor for driver	Handle	Tissue punch	Ratchet wrench	Ratchet torque	Depth gauge	Parallel pin	Technical driver
Material	Stainless steel							




## Healing caps




Product code	HN - 2.1, 2 mm	HN - 2.1, 3 mm	HN - 2.1, 4 mm
Ref. number	N10472	N10473	N10474
Length	D: 4,7 mm H: 2 mm	D: 4,7 mm H: 3 mm	D: 4,7 mm H: 4 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 15 Ncm for the screw.		

## Wide healing caps



Product code	HWN - 2.1, 2 mm	HWN - 2.1, 4 mm
Ref. number	N10582	N10584
Length	D: 5,8 mm H: 2 mm	D: 5,8 mm H: 4 mm
Material	Titanium 6AL-4V	
Instructions	⚠ Recommended tightening torque 15 Ncm for the screw.	

## Narrow healing caps



Product code	HNN - 2.1, 2 mm	HNN - 2.1, 4 mm
Ref. number	N10382	N10384
Length	D: 3,8 mm H: 2 mm	D: 3,8 mm H: 4 mm
Material	Titanium 6AL-4V	
Instructions	⚠ Recommended tightening torque 15 Ncm for the screw.	




## Impression platform



Product code	T3N - 2.1	T2N - 2.1	T1N - 2.1
Ref. number	Transfer: N79 Plastic: M80	N78	N76
Length	9 mm	9 mm	13 mm
Material	Titanium 6AL-4V	Stainless steel	
Instructions	⚠ Recommended tightening torque 15 Ncm for the screw.		

## Analog



Product code	A1N - 2.1
Ref. number	N08
Length	10 mm
Material	Titanium 6AL-4V
Instructions	⚠ Recommended tightening torque 15 Ncm for the screw.

## Step-by-step using T3N transfer


**T3N**



Insert the impression coping plastic caps on the closed tray impression coping abutments. The impression coping plastic caps should be placed on the abutment, assuring that the arrow on the plastic coping corresponds to the flat facet of the abutment.





## Prosthetic accessories




Product code	S1PNHN - 2.1*	S1PNN - 2.1*
Ref. number	N82	N81
Length	H: 10 mm	H: 10 mm
Material	Titanium 6AL-4V	
Instructions	<p> <b>Recommended tightening torque 25 Ncm for the screw.</b></p> <p><b>S1PNH</b> - Plastic abutment for casting with hex. Good for the single tooth/crown with internal hexagon.</p> <p><b>S1PN</b> - Plastic abutment for casting without hex. Good for the bridge/bar without internal hexagon.</p>	

## Abutment for casting






**[New!]**  
Crome - Cobalt



Product code	S1PCHN - 2.1, 11 mm	S1PTN - 2.1, 11 mm
Ref. number	N85	N83
Length	H: 11 mm	H: 11 mm
Material	Plastic / Chrome - Cobalt	Plastic / Titanium
Instructions	<p> <b>Recommended tightening torque 25 Ncm for the screw.</b></p>	

## Straight abutments



Product code	S1N - 2.1, 9	S1WN - 2.1, 9	S1AN - 2.1, 1
Ref. number	N119	N11W9	N121
Length	H: 9 mm	H: 9 mm	H: 1 mm
Material	Titanium 6AL-4V		
Instructions	<p> <b>Recommended tightening torque 25 Ncm for the screw.</b></p>		



## Angular abutments




Product code	S2N - 2.1, 15°	S2AN - 2.1, 15° - 1 mm	S2N - 2.1, 25°	S2AN - 2.1, 25° - 1 mm
Ref. number	N1315	N15151	N1325	N15251
Length	H: 10 mm	H: 1 mm	H: 10 mm	H: 1 mm
Material	Titanium 6AL-4V			
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.			

## S-Lock abutment - S35N New!




Product code	S35N - 2.1, 1 mm	S35N - 2.1, 2 mm	S35N - 2.1, 3 mm
Ref. number	N1121	N1122	N1123
Length	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.		

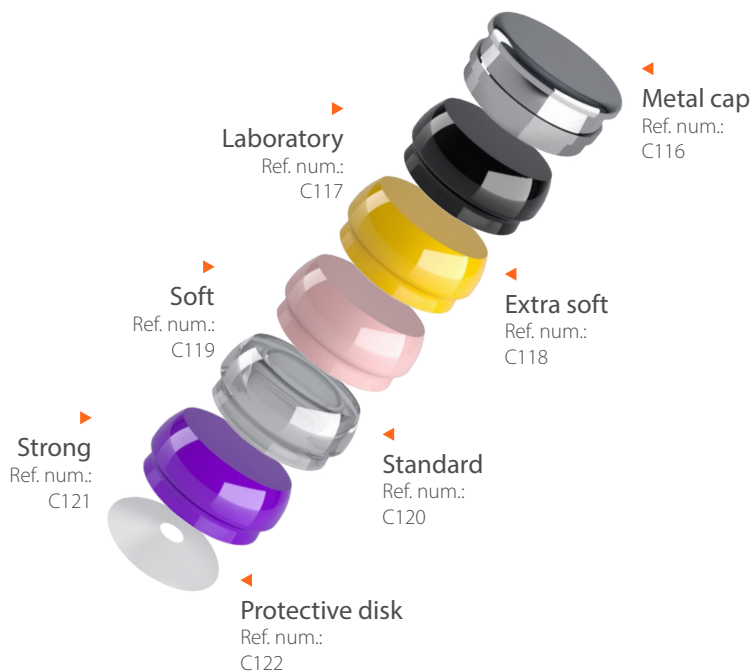



## Straight zirconium abutments with titanium base [New!]






Product code	S1AZNT - 2.1, 1 mm	S1AZNT - 2.1, 2 mm
Ref. number	N161T	N162T
Length	H: 1 mm	H: 2 mm
Material	Zirconium / Titanium 6AL-4V	
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.	

## Angular zirconium abutments with titanium base 15° / 25° [New!]



Product code	S2AZNT - 2.1, 15° - 1 mm	S2AZNT - 2.1, 15° - 2 mm	S2AZNT - 2.1, 25° - 1 mm	S2AZNT - 2.1, 25° - 2 mm
Ref. number	N17151T	N17152T	N17251T	N17252T
Length	H: 1 mm	H: 2 mm	H: 1 mm	H: 2 mm
Material	Zirconium / Titanium 6AL-4V			
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.			


## Peek abutments [New!]



Product code	S1AN - Peek - 2.1, 1 mm	S2AN - Peek - 2.1, 15° - 1 mm	S2AN - Peek - 2.1, 25° - 1 mm
Ref. number	N181	N19151	N19251
Length	H: 2 mm	H: 2 mm	H: 2 mm
Material	Peek-Classix polymer		
Instructions	⚠ The peek abutments can be used for maximum 1 year. Recommended tightening torque 15 Ncm for the screw.		




## Overdenture ball attachments




Product code	S3N - 2.1, 1 mm	S3N - 2.1, 2 mm	S3N - 2.1, 3 mm	S3N - 2.1, 4 mm
Ref. number	N201	N202	N203	N204
Length	H: 1 mm	H: 2 mm	H: 3 mm	H: 4 mm
Material	Titanium 6AL-4V			
Instructions	Recommended tightening torque 25 Ncm for the screw. The package contains only the standard silicone cap!			

## Slim overdenture ball attachments



Product code	S3NN - 2.1, 1 mm	S3NN - 2.1, 2 mm	S3NN - 2.1, 3 mm	S3NN - 2.1, 4 mm
Ref. number	N20N1	N20N2	N20N3	N20N4
Length	H: 1 mm	H: 2 mm	H: 3 mm	H: 4 mm
Material	Titanium 6AL-4V			
Instructions	Recommended tightening torque 25 Ncm for the screw. The package contains only the standard silicone cap!			

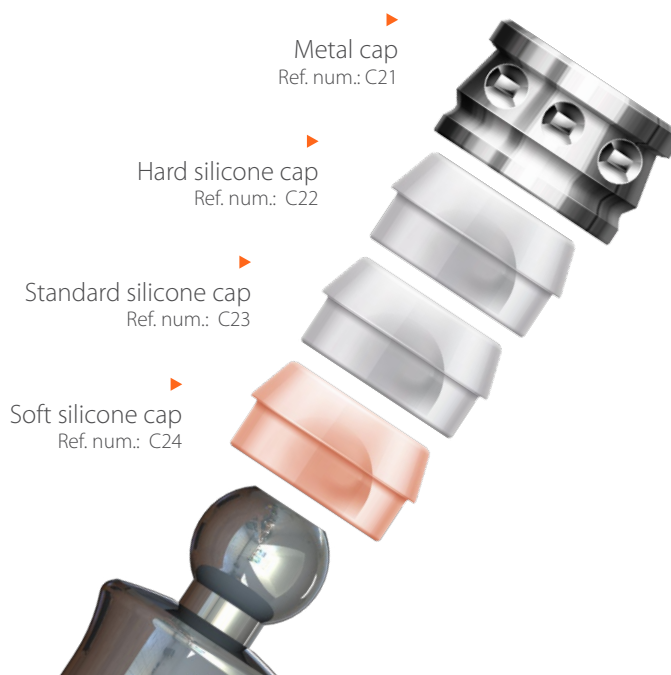





Scanning abutment for 3D



Product code	SPCR - 2.1, 11 mm
Ref. number	N107
Length	11 mm
Material	Peek-Classix polymer

Titanium base for the zirconium abutment



Product code	STCN - 2.1 with hex	STCNN - 2.1 without hex
Ref. number	N108	N109
Length		
Material	Titanium 6AL-4V	
Instructions	Intended to be used for custom casting prosthetic restorations on single or multiple implants	Intended to be used for custom casting prosthetic restorations only on multiple implants

Analog and screws




Product code	A1N - 2.1	S1a - 2.1	S1aa - 2.1
Ref. number	N08	N110	N110/b
Length	H: 12 mm	H: 8 mm	H: 8 mm
Material	Stainless steel		Titanium 6AL-4V
Instructions	Suitable for all diameters of P1/P7	For laboratory use	Standard abutment screw





## Individual block for milling




Product code	SIBN - 2.1
Ref. number	N111
Length	H: 25 mm
Material	Titanium 6AL-4V
Instructions	The titanium block abutment suitable for individual CAD CAM system

## Supported systems



*Dental Wings, 3shape, AmannGirrbach, Zirkonzahn and Exocad are trademarks or registered trademarks of their respective owners: Dental Wings LLC., 3Shape A/S, Amann Gribbach AG, Zirkonzahn USA Inc., Exocad GmbH.*


Ask our colleagues for detailed instructions and download links to library data.

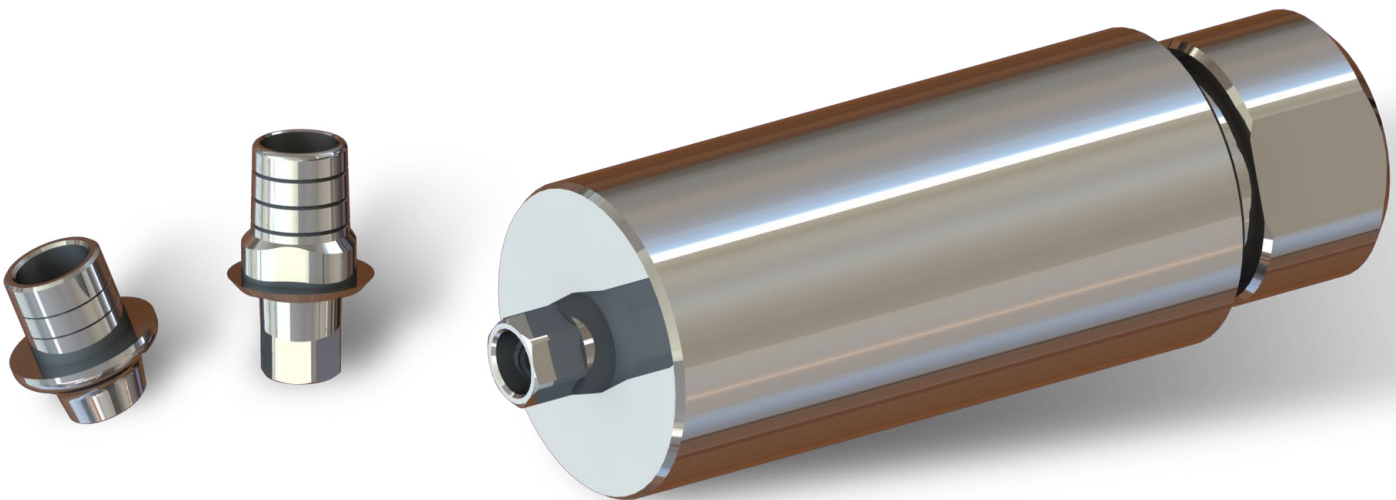



# CONICAL PLATFORM

---

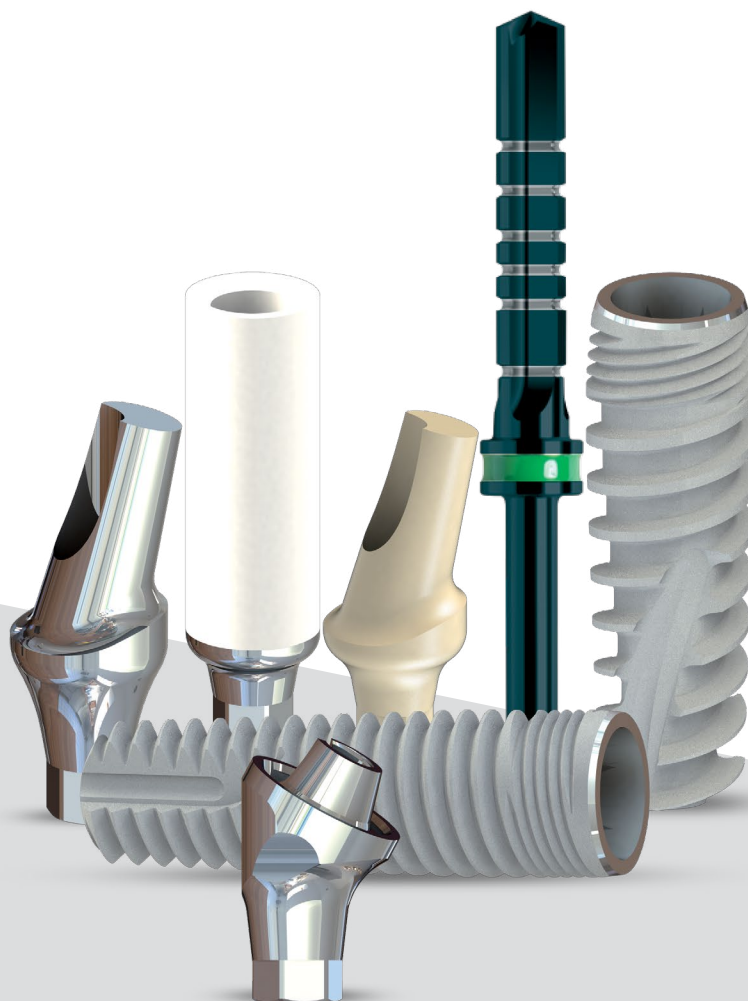





Please note the image shown is for illustration purposes only!







## Instrument tools and drivers









Instrument tools and drivers

					
Product code	K5 - 0 mm	K5D - 9 mm	K5D - 15 mm	K8D - 23 mm	K8D - 28 mm
Ref. number	B50	DB59	DB515	DB823	DB828
Length	0 mm	9 mm	15 mm	23 mm	28 mm
Description	Driver for implants			Adaptor for implants	
Material	Stainless steel				

## Prosthetic tools for the abutments

							
Product code	K1 - 9 mm	K1 - 15 mm	K2 - 9 mm	K2 - 15 mm	K9 - 23 mm	DG	K7
Ref. number	B19	B115	B29	B215	B923	C125	B7
Length	9 mm	15 mm	9 mm	15 mm	23 mm		18 mm
Description	Driver for abutments		Hand driver for abutments		Adaptor for abutments	Depth checker	Retrieval screw
Material	Stainless steel					Titanium	

## Implantology tools

								
Product code	K3D/K3M	D9	D17	R8	R8T	M+	DP	K10
Ref. number	B30001/B30002	C87	C88	C97	C98	C96	C8920/C8927	B0
Description	Adaptor for driver	Handle	Tissue punch	Ratchet wrench	Ratchet torque	Depth gauge	Parallel pin	Technical driver
Material	Stainless steel							

**3,5**

Length

8 mm

10 mm

11,5 mm

13 mm

16 mm

Ref. number

D03358

D033510

D033511

D033513

D033516

**3,75**

Length

8 mm

10 mm

11,5 mm

13 mm

16 mm

Ref. number

D03378

D033710

D033711

D033713

D033716

**4,2**

Length

8 mm

10 mm

11,5 mm

13 mm

16 mm

Ref. number


D03428

D034210

D034211

D034213

D034216

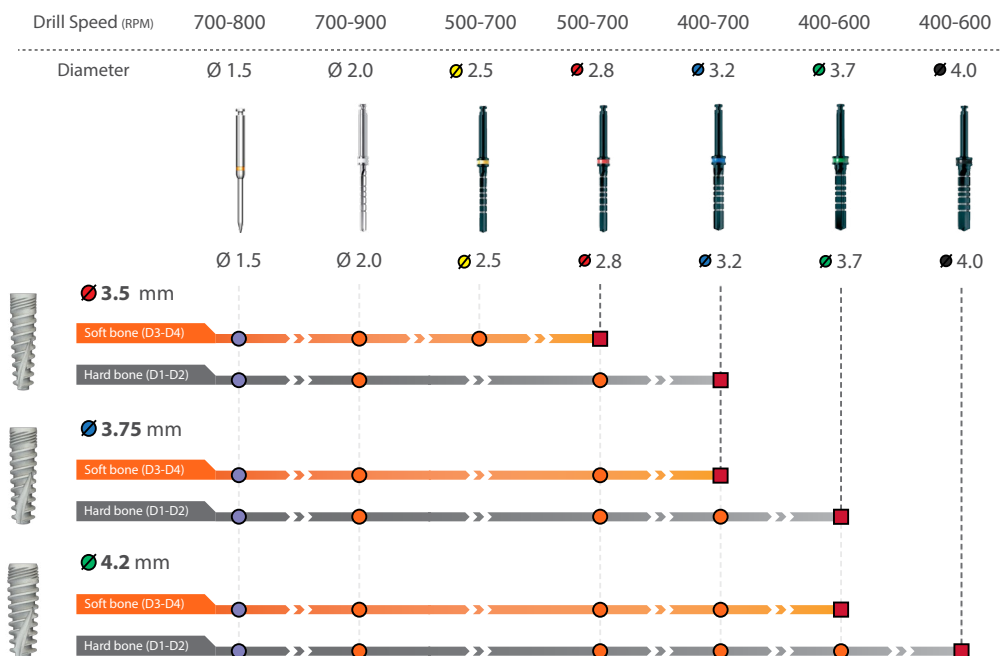

- Marker drill - used to make only a mark
- Throughout entire implant's length
- Drill only through the cortical bone, should not be used to full depth.  
If the cortical bone is hard (D1), you may use this drill as a countersink.

An additional 0,8 - 1,0 mm must be added to the length of the drill to account for the angled cutting up.  
Procedure recommended by SGS cannot replace the judgment and the experience of the surgeon!


**4,5**


Length

6 mm

8 mm

10 mm

11,5 mm

13 mm

16 mm

Ref. number

D03456

D03458

D034510

D034511

D034513

D034516

**5**


Length

6 mm

8 mm

10 mm

11,5 mm

13 mm

16 mm

Ref. number

D0356

D0358

D03510

D03511

D03513

D03516

**6**


Length

6 mm

8 mm

10 mm

11,5 mm

13 mm

16 mm

Ref. number

D0366

D0368

D03610

D03611

D03613

D03616

Drill Speed (RPM)

700-800

700-900

500-700

500-700

400-700

400-600

400-600

400-600

300-500

Diameter

Ø 1.5

Ø 2.0

Ø 2.5

Ø 2.8

Ø 3.2

Ø 3.7

Ø 4.0

Ø 4.5

Ø 5.5



Ø 1.5

Ø 2.0

Ø 2.5

Ø 2.8

Ø 3.2

Ø 3.7

Ø 4.0

Ø 4.5

Ø 5.5

Ø 4.5 mm

Soft bone (D3-D4)

Hard bone (D1-D2)

Ø 5 mm

Soft bone (D3-D4)

Hard bone (D1-D2)

Ø 6 mm

Soft bone (D3-D4)

Hard bone (D1-D2)

- Marker drill - used to make only a mark
- Throughout entire implant's length

■ Drill only through the cortical bone, should not be used to full depth.  
 If the cortical bone is hard (D1), you may use this drill as a countersink.

An additional 0,8 - 1,0 mm must be added to the length of the drill to account for the angled cutting up.  
 Procedure recommended by SGS cannot replace the judgment and the experience of the surgeon!



**3,5**


Length	8 mm	10 mm	11,5 mm	13 mm	16 mm
Ref. number	D07358	D073510	D073511	D073513	D073516

**3,75**

Length	8 mm	10 mm	11,5 mm	13 mm	16 mm
Ref. number	D07378	D073710	D073711	D073713	D073716

**4,2**

Length	8 mm	10 mm	11,5 mm	13 mm	16 mm
Ref. number	D07428	D074210	D074211	D074213	D074216

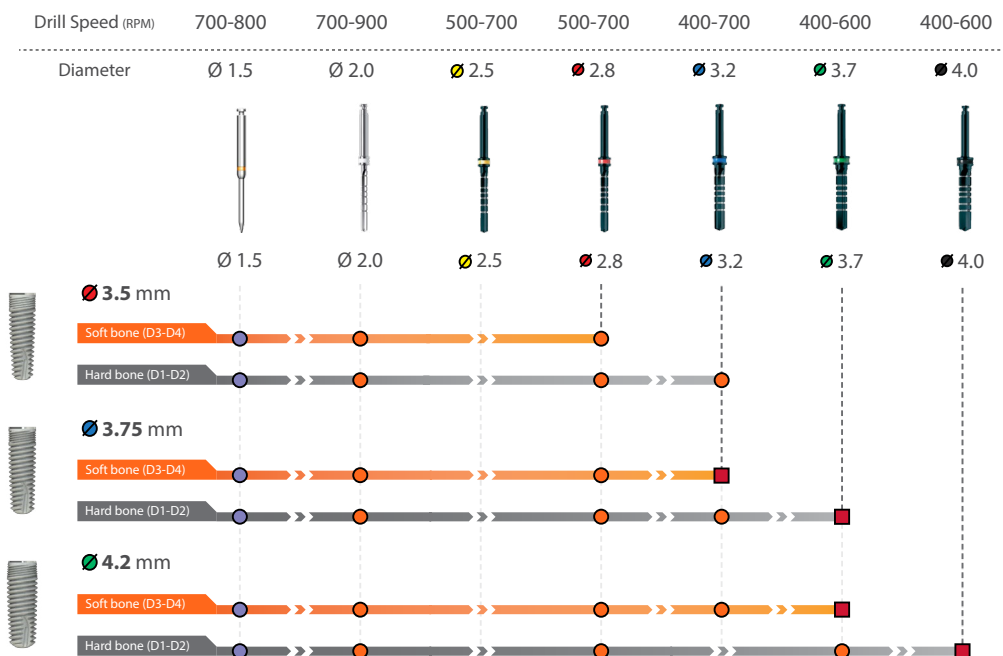

- Marker drill - used to make only a mark
- Throughout entire implant's length
- Drill only through the cortical bone, should not be used to full depth.  
If the cortical bone is hard (D1), you may use this drill as a countersink.







An additional 0,8 - 1,0 mm must be added to the length of the drill to account for the angled cutting up.  
Procedure recommended by SGS cannot replace the judgment and the experience of the surgeon!




5

						
Length	6 mm	8 mm	10 mm	11,5 mm	13 mm	16 mm
Ref. number	D0756	D0758	D07510	D07511	D07513	D07516

6

						
Length	6 mm	8 mm	10 mm	11,5 mm	13 mm	16 mm
Ref. number	D0766	D0768	D07610	D07611	D07613	D07616

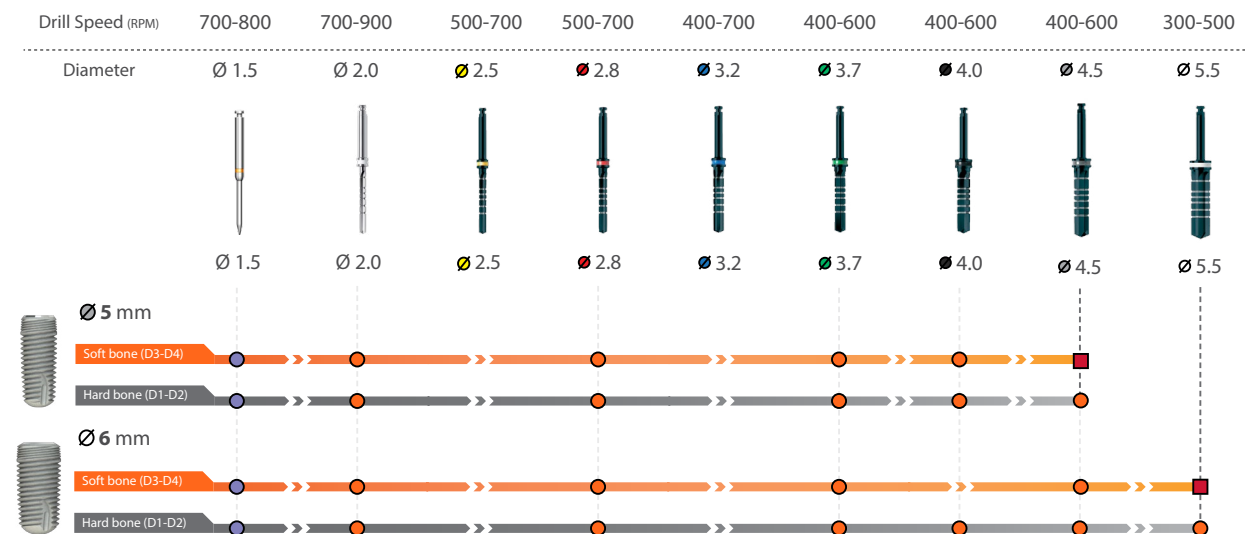


- Marker drill - used to make only a mark
- Throughout entire implant's length
- Drill only through the cortical bone, should not be used to full depth.  
If the cortical bone is hard (D1), you may use this drill as a countersink.

An additional 0,8 - 1,0 mm must be added to the length of the drill to account for the angled cutting up.  
Procedure recommended by SGS cannot replace the judgment and the experience of the surgeon!







## Healing caps





Product code	HD - 2 mm	HD - 3 mm	HD - 4 mm	HD - 5 mm	HD - 6 mm
Ref. number	D10472	D10473	D10474	D10475	D10476
Dimensions	D: 4,7 mm H: 2 mm	D: 4,7 mm H: 3 mm	D: 4,7 mm H: 4 mm	D: 4,7 mm H: 5 mm	D: 4,7 mm H: 6 mm
Material	Titanium 6AL-4V				
Instructions	Suitable for all implant diameters. ⚠ Recommended tightening torque max. 15 Ncm for the screw.				

## Wide healing caps



Product code	HWD - 3 mm	HWD - 5 mm	HW7D - 3 mm	HW7D - 5 mm	HW8D - 3 mm	HW8D - 5 mm
Ref. number	D10583	D10585	D10703	D10705	D10803	D10805
Dimensions	D: 5,8 mm H: 3 mm	D: 5,8 mm H: 5 mm	D: 7,0 mm H: 3 mm	D: 7,0 mm H: 5 mm	D: 8,0 mm H: 3 mm	D: 8,0 mm H: 5 mm
Material	Titanium 6AL-4V					
Instructions	Suitable for all implant diameters.  Recommended tightening torque max. 15 Ncm for the screw.					


## Narrow healing caps



Product code	HND - 2 mm	HND - 3 mm	HND - 4 mm
Ref. number	D10382	D10383	D10384
Dimensions	D: 3,8 mm H: 2 mm	D: 3,8 mm H: 3 mm	D: 3,8 mm H: 4 mm
Material	Titanium 6AL-4V		
Instructions	Suitable for all implant diameters. ⚠ Recommended tightening torque max. 15 Ncm for the screw.		




## Open tray transfers




[New!]

(S)  
SLIM




[New!]

(S)  
SLIM




[New!]

(S)  
SLIM




Product code	T1D - 15 mm	T5D - 11 mm	T4D - 15 mm <i>slim</i>	T6D - 11 mm <i>slim</i>	T8D - 15 mm <i>slim</i>
Ref. number	D7615	D7611	D7615H	D7611S	D7615S
Dimensions	D: 4,5 mm H: 15 mm	D: 4,5 mm H: 11 mm	D: 3,6 mm H: 15 mm	D: 3,6 mm H: 11 mm	D: 3,6 mm H: 15 mm
Material	Stainless steel				
Instructions	⚠ Recommended tightening torque max. 15 Ncm for the screw.				

## Closed tray transfers




[New!]


(S)  
SLIM



2,5 mm




Product code	T1D - 9 mm	T7D - 9 mm <i>slim</i>	T3D - 9 mm
Ref. number	D779	D779S	Transfer: D79 Plastic: M80
Dimensions	9 mm	9 mm	9 mm
Material	Stainless steel		Titanium 6AL-4V / Plastic
Instructions	⚠ Recommended tightening torque max. 15 Ncm for the screw.		

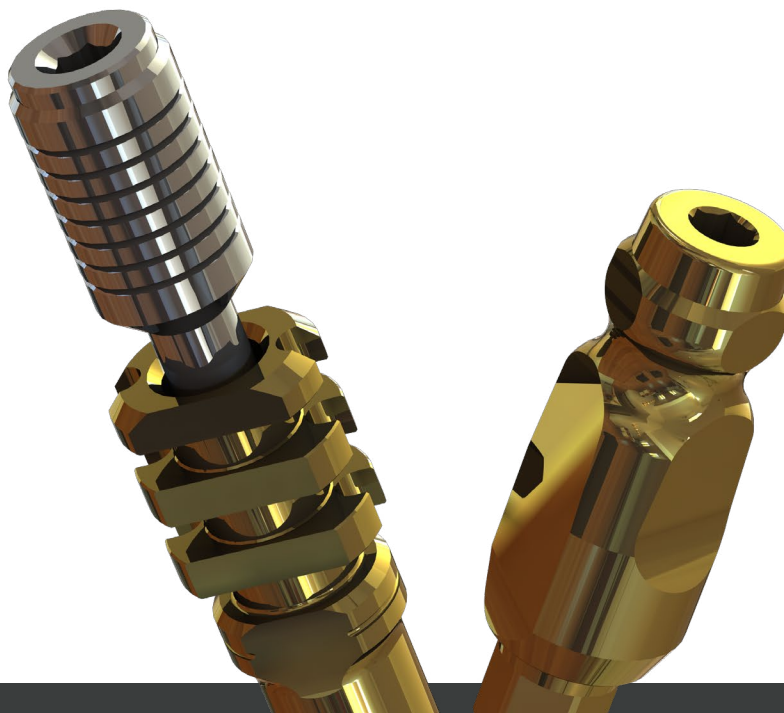



## Analog



Product code

A1D

Ref. number

D08

Dimensions

H: 12 mm

Material

Stainless steel

Instructions

⚠ Recommended tightening torque 15 Ncm for the screw.

▶  
T5D  
transfer

▶  
A1D  
analog





## Straight abutments



Product code	S1D - 5 mm	S1D - 7 mm	S1D - 9 mm	S1D - 12 mm	S1D - 15 mm
Ref. number	D115	D117	D119	D1112	D1115
Dimensions	H: 5 mm	H: 7 mm	H: 9 mm	H: 12 mm	H: 15 mm
Material	Titanium 6AL-4V				
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.				

## Straight narrow abutments




Product code	S1ND - 7 mm	S1ND - 9 mm
Ref. number	D11N7	D11N9
Dimensions	H: 7 mm	H: 9 mm
Material	Titanium 6AL-4V	
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.	

## Straight wide abutment



Product code	S1WD - 9 mm	S1WD - 12 mm
Ref. number	D11W9	D11W12
Dimensions	H: 9 mm	H: 12 mm
Material	Titanium 6AL-4V	
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.	


## Anatomic straight abutments

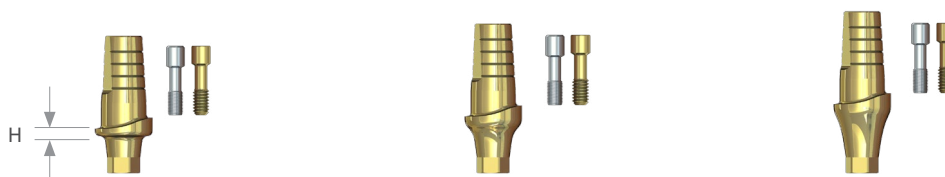

Product code	S1AD - 1 mm	S1AD - 2 mm	S1AD - 3 mm
Ref. number	D121	D122	D123
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.		





## Angular abutments 15°





Product code	S2D - 15° - 11 mm	S2LD - 15° - 15 mm	S2DS - 15° - 15 mm <b>slim</b>
Ref. number	D131511	D131515	D141515
Dimensions	H: 11 mm	H: 15 mm	H: 15 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.		

## Angular abutments 25°



Product code	S2D - 25° - 11 mm	S2LD - 25° - 15 mm	S2DS - 25° - 15 mm <b>slim</b>
Ref. number	D132511	D132515	D142515
Dimensions	H: 11 mm	H: 15 mm	H: 15 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.		




## Angular abutments 35° - 45°



Product code	S2D - 35° - 13 mm	S2D - 45° - 13 mm
Ref. number	D133513	D134513
Dimensions	H: 13 mm	H: 13 mm
Material	Titanium 6AL-4V	
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.	






## Anatomic angular abutments 15°




Product code	S2AD - 15° - 1 mm	S2AD - 15° - 2 mm	S2AD - 15° - 3 mm
Ref. number	D15151	D15152	D15153
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.		

## Anatomic angular abutments 25°



Product code	S2AD - 25° - 1 mm	S2AD - 25° - 2 mm	S2AD - 25° - 3 mm
Ref. number	D15251	D15252	D15253
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.		

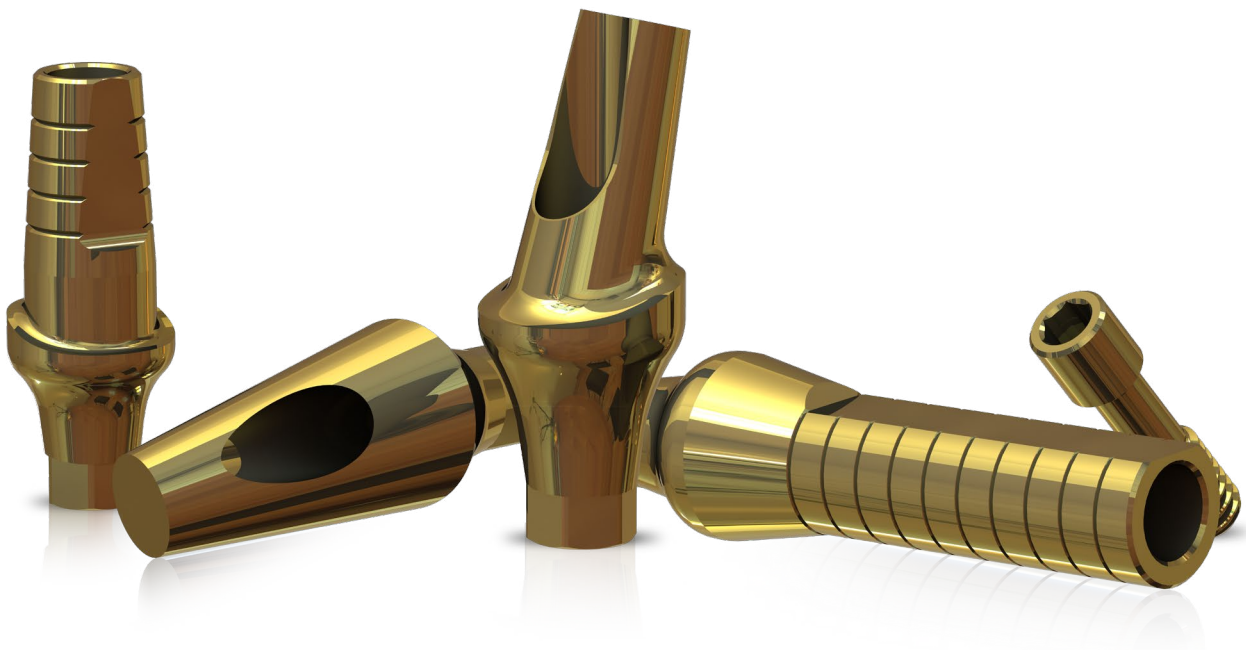



## Anatomic zirconium abutments



Product code	S1AZDT - 1 mm	S1AZDT - 2 mm	S1AZDT - 3 mm
Ref. number	D16T1	D16T2	D16T3
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Zirconia / Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.		

## Anatomic angular zirconium abutments 15°



Product code	S2AZDT - 15° - 1 mm	S2AZDT - 15° - 2 mm	S2AZDT - 15° - 3 mm
Ref. number	D17151T	D17152T	D17153T
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Zirconia / Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.		


## Anatomic angular zirconium abutments 25°



Product code	S2AZDT - 25° - 1 mm	S2AZDT - 25° - 2 mm	S2AZDT - 25° - 3 mm
Ref. number	D17251T	D17252T	D17253T
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Zirconia/ Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.		





## Abutments for casting



Product code	S1PNHD - 11 mm	S1PND - 11 mm
Ref. number	D82	D81
Dimensions	H: 11 mm	H: 11 mm
Material	Plastic	
Instructions	⚠ Recommended tightening torque max. 30 Ncm for the screw.	

## Abutments for casting



Product code	S1PTD - 11 mm	S1PCHD - 11 mm	S1PCD - 11 mm
Ref. number	D83	D85	D84
Dimensions	H: 11 mm	H: 11 mm	H: 11 mm
Material	Plastic / Titanium 6AL-4V	Plastic / Chrome - Cobalt	Plastic / Chrome - Cobalt
Instructions	Melting range: > 900 °C		
	Melting range: > 1290 °C - 1380 °C		


## Abutments for bars



Product code	S1TD - 0.5 mm	S1TD - 1.5 mm	S1TD - 2.5 mm	S1TD - 3.5 mm
Ref. number	D8605	D8615	D8625	D8635
Dimensions	H: 0,5 mm	H: 1,5 mm	H: 2,5 mm	H: 3,5 mm
Material	Titanium 6AL-4V / Plastic			
Instructions	⚠ Recommended tightening torque max. 30 Ncm for the screw.			




## Anatomic straight peek abutments




Product code	S1AD - Peek - 1 mm	S1AD - Peek - 2 mm	S1AD - Peek - 3 mm
Ref. number	D181	D182	D183
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Peek-Classix polymer		
Instructions	⚠ The peek abutments can be used for maximum 1 year. Recommended tightening torque 15 Ncm for the screw.		

## Anatomic angular peek abutments




Product code	S2AD - Peek - 15° - 1 mm	S2AD - Peek - 15° - 2 mm	S2AD - Peek - 15° - 3 mm
Ref. number	D19151	D19152	D19153
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Peek-Classix polymer		
Instructions	⚠ The peek abutments can be used for maximum 1 year. Recommended tightening torque 15 Ncm for the screw.		

## Anatomic angular peek abutments



Product code	S2AD - Peek - 25° - 1 mm	S2AD - Peek - 25° - 2 mm	S2AD - Peek - 25° - 3 mm
Ref. number	D19251	D19252	D19253
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Peek-Classix polymer		
Instructions	⚠ The peek abutments can be used for maximum 1 year. Recommended tightening torque 15 Ncm for the screw.		




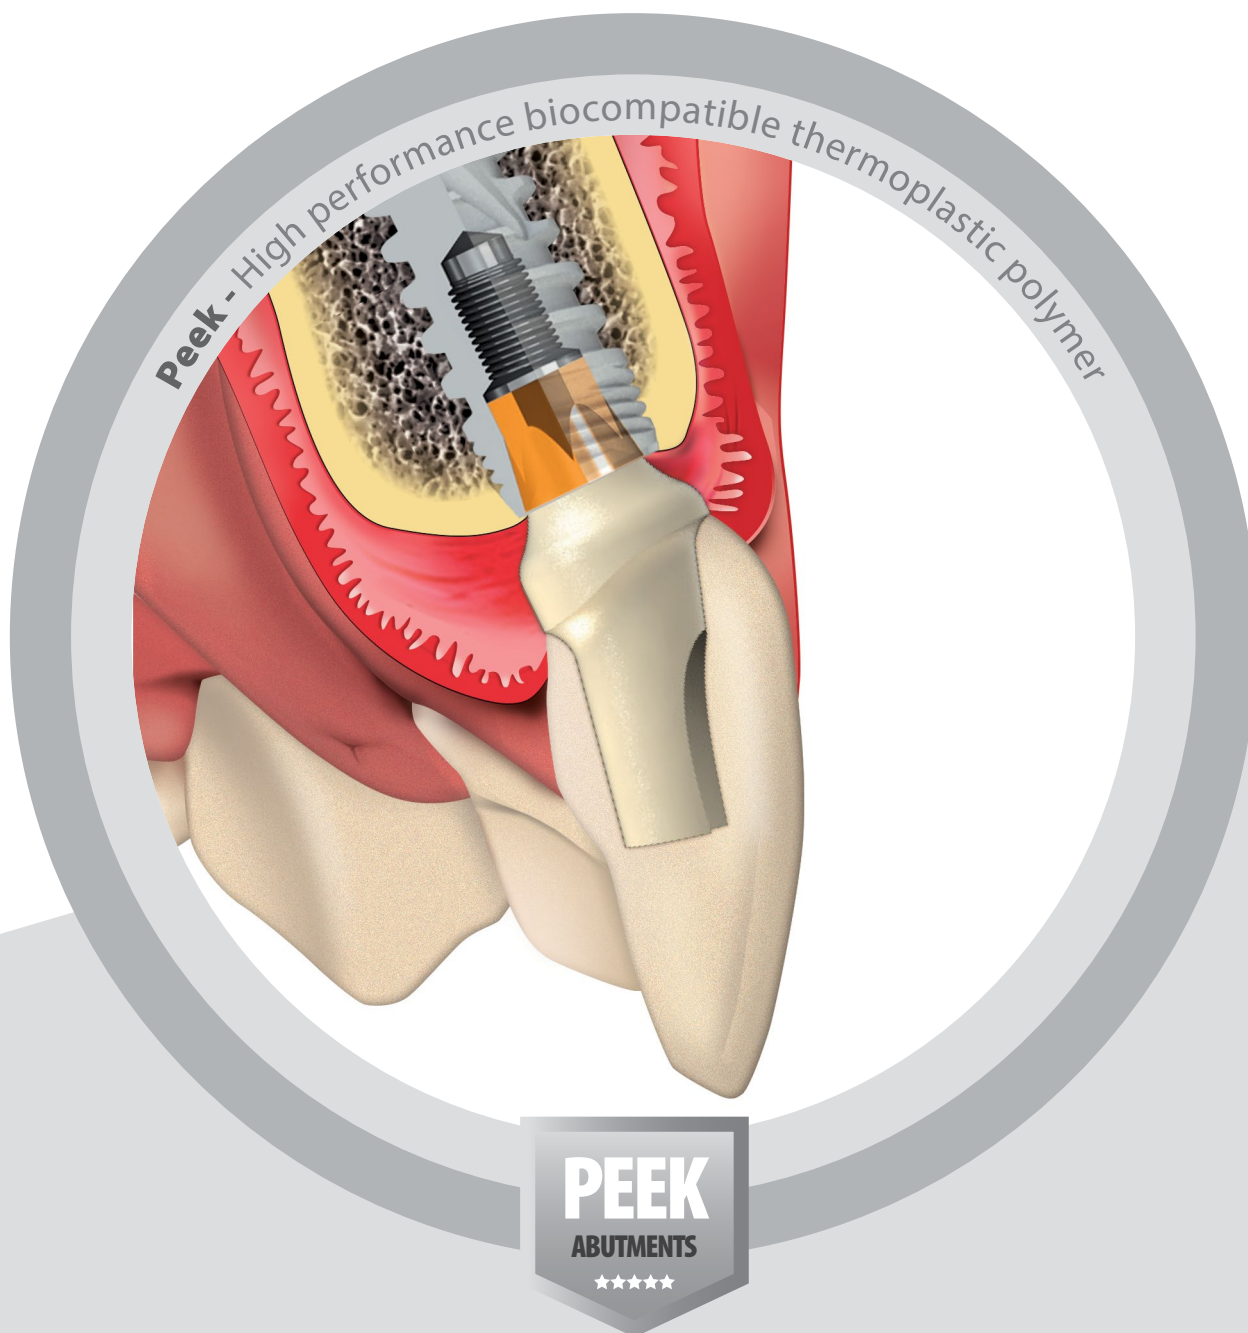

**O**ur products are proven, non-metallic biomaterials that offer superior imaging properties and performance benefits compared to alternative materials. All peek products are high performance biomaterials, engineered for biocompatibility, safety and bio-stability, featuring a proven history of clinical results and regulatory approval.





## Scanning abutment for 3D



Product code	SPCRD, 11 mm
Ref. number	D107
Length	11 mm
Material	Peek-Classix polymer

## Titanium base for the zirconium abutment




Product code	STCD with hex	STCND without hex
Ref. number	D108	D109
Length		
Material	Titanium 6AL-4V	
Instructions	Intended to be used for custom casting prosthetic restorations on single or multiple implants	Intended to be used for custom casting prosthetic restorations only on multiple implants

## Analog and screws



Product code	A1D	S1a	S1aa-d
Ref. number	D08	D110	D110/b
Length	H: 12 mm	H: 8 mm	H: 8 mm
Material	Stainless steel	Titanium 6AL-4V	
Instructions	Suitable for all diameters of P1/P7	For laboratory use	Standard abutment screw

## Individual block for milling




Product code	SIBD
Ref. number	D111
Length	H: 25 mm
Material	Titanium 6AL-4V
Instructions	The titanium block abutment suitable for individual CAD CAM system

## Supported systems




*Dental Wings, 3shape, AmannGirrbach, Zirkonzahn and Exocad are trademarks or registered trademarks of their respective owners:  
Dental Wings LLC., 3Shape A/S, Amann Gribbach AG, Zirkonzahn USA Inc., Exocad GmbH.*

Ask our colleagues for detailed instructions and download links to library data.

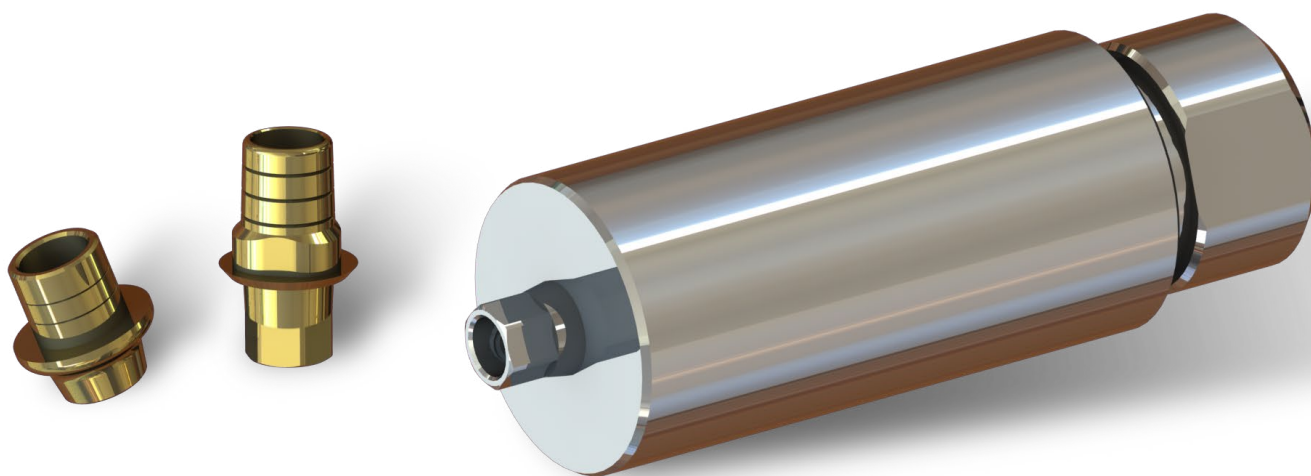





## Ball attachment



Product code	S3D - 1 mm	S3D - 2 mm	S3D - 3 mm	S3D - 4 mm	S3D - 5 mm	S3D - 6 mm
Ref. number	D201	D202	D203	D204	D205	D206
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm	H: 4 mm	H: 5 mm	H: 6 mm
Material	Titanium 6AL-4V					
Instructions	 Recommended tightening torque 25 Ncm for the screw. The package contains only the standard silicone.					


## Ball attachment 17°



Product code	S3 - S7D - 17° - 1 mm	S3 - S7D - 17° - 2 mm	S3 - S7D - 17° - 3 mm
Ref. number	D32171 / C4205	D32172 / C4205	D32173 / C4205
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	 Recommended tightening torque 25 Ncm for the screw. The basic package contains 0,5 mm ball attachment part.		


## Ball attachment 30°



Product code	S3 - S7D - 30° - 1 mm	S3 - S7D - 30° - 2 mm	S3 - S7D - 30° - 3 mm
Ref. number	D32301 / C4205	D32302 / C4205	D32303 / C4205
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	 Recommended tightening torque 25 Ncm for the screw. The basic package contains 0,5 mm ball attachment part.		



## S3 - S7D Ball Attachment parts

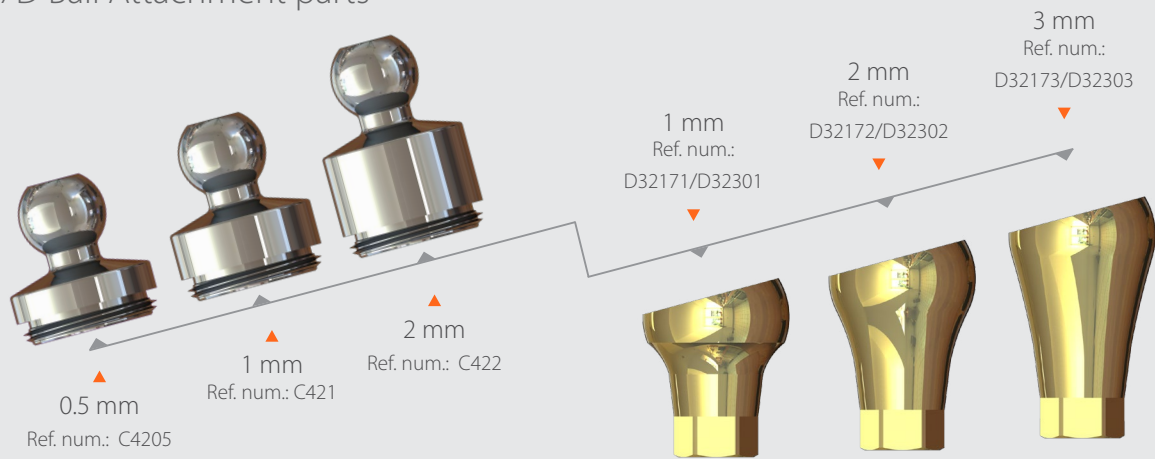

Metal cap  
Ref. num.: C21




Hard silicone cap  
Ref. num.: C22



Standard silicone cap  
Ref. num.: C23



Soft silicone cap  
Ref. num.: C24

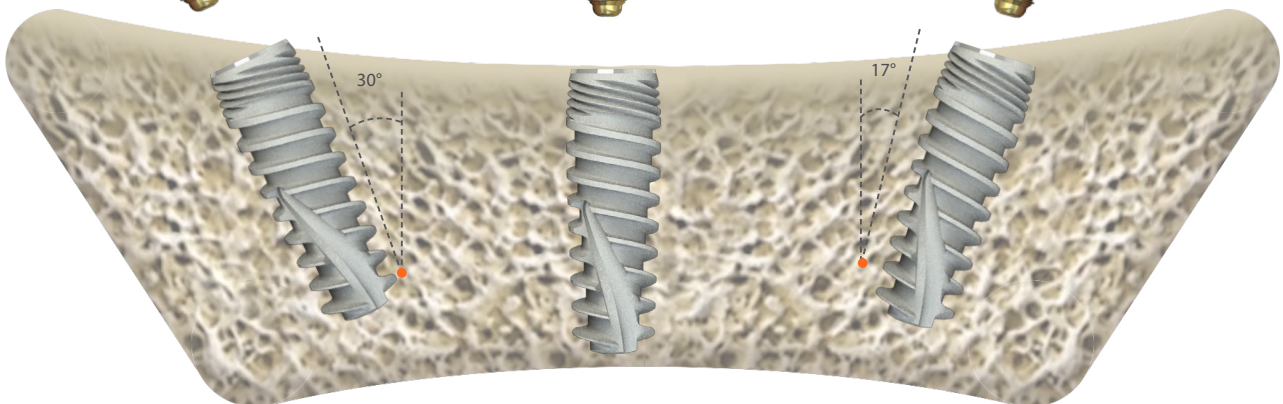

The package contains only the standard silicone cap!



## Abutments for immediate loading



Product code	S4D - 0.5 mm	S4D - 1.5 mm	S4D - 2.5 mm	S4D - 3.5 mm
Ref. number	D2605	D2615	D2625	D2635
Dimensions	H: 0,5 mm	H: 1,5 mm	H: 2,5 mm	H: 3,5 mm
Material	Titanium 6AL-4V			
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.			

## Angular abutments for immediate loading 17°



Product code	S4 - S7D - 17° - 1 mm	S4 - S7D - 17° - 2 mm	S4 - S7D - 17° - 3 mm
Ref. number	D32171 / C43	D32172 / C43	D32173 / C43
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.		

## Angular abutments for immediate loading 30°




Product code	S4 - S7D - 30° - 1 mm	S4 - S7D - 30° - 2 mm	S4 - S7D - 30° - 3 mm
Ref. number	D32301 / C43	D32302 / C43	D32303 / C43
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.		






[30°]

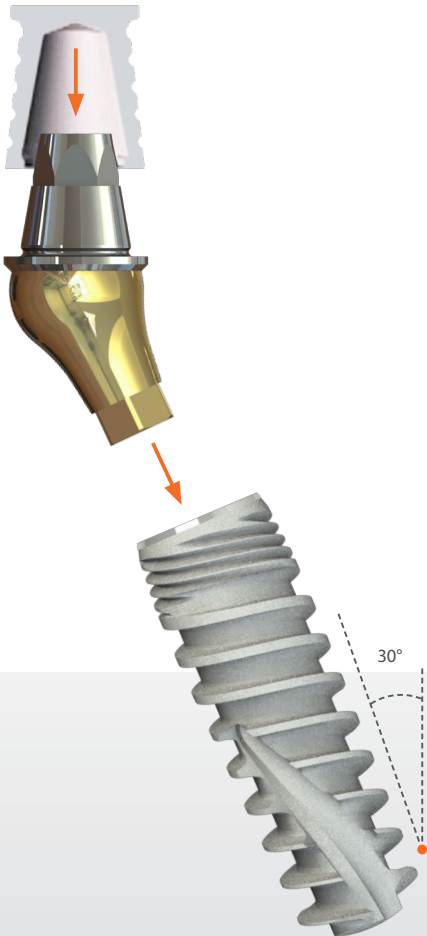

[0°]




[17°]

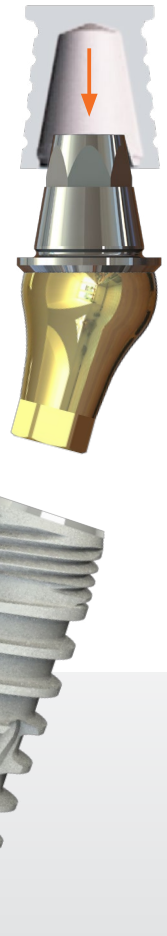



## S-Lock abutment - S35D



Product code	S35D - 1 mm	S35D - 2 mm	S35D - 3 mm	S35D - 4 mm	S35D - 5 mm	S35D - 6 mm
Ref. number	D1121	D1122	D1123	D1124	D1125	D1126
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm	H: 4 mm	H: 5 mm	H: 6 mm
Material	Titanium 6AL-4V					
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.					

## S-Lock angular abutment - S35D - S7D - 17°



Product code	S35 - S7D - 17° - 1mm	S35 - S7D - 17° - 2mm	S35 - S7D - 17° - 3mm
Ref. number	D32171 / C113	D32172 / C113	D32173 / C113
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.		

## S-Lock angular abutment - S35D - 30°



Product code	S35 - S7D - 30° - 1mm	S35 - S7D - 30° - 2mm	S35 - S7D - 30° - 3mm
Ref. number	D32301 / C113	D32302 / C113	D32303 / C113
Dimensions	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 30 Ncm for the screw.		



## Accessories for S-Lock



**T1-S35 Transfer**  
Ref. num.:  
C114



**A1-S35 Analog**  
Ref. num.:  
C115



**K1 - 9 mm**  
Ref. num.:  
B19




**K1 - 15 mm**  
Ref. num.:  
B115



**K2 - 9 mm**  
Ref. num.:  
B29



**K2 - 15mm**  
Ref. num.:  
B215



**K21 Hand tool**  
Ref. num.:  
B21



**K9 - 23 mm**  
Ref. num.:  
B923

**Metal cap**  
Ref. num.:  
C116



**Laboratory**  
Ref. num.:  
C117



**Extra soft**  
Ref. num.:  
C118



**Soft**  
Ref. num.:  
C119




**Standard**  
Ref. num.:  
C120




**Strong**  
Ref. num.:  
C121



**Protective disk**  
Ref. num.:  
C122

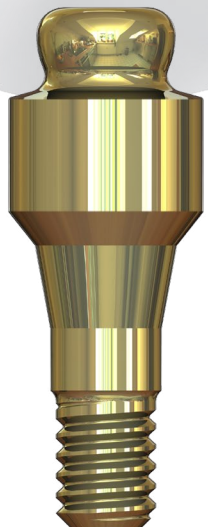

The package contains all the caps illustrated above.

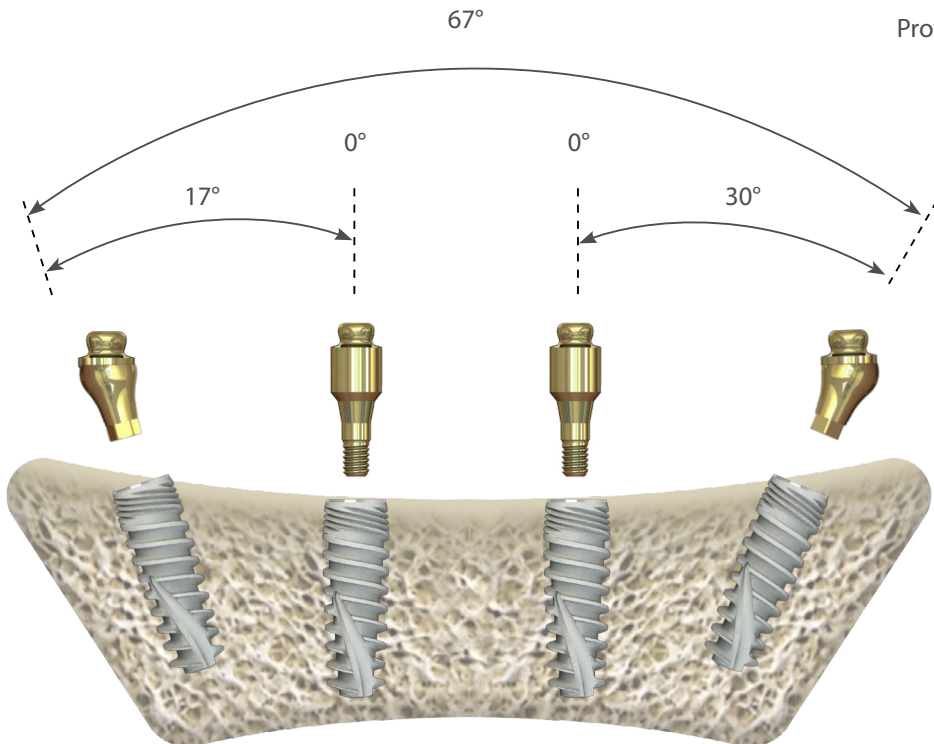

S35D recommended below 20 degrees, S35 - S7D - 17 ° / S35 - S7D - 30° recommended above 25 degrees of divergence between implant.



## Easy-Fix abutments - S5D



Product code	S5D - 1 mm	S5D - 2 mm	S5D - 3 mm	S5D - 4 mm	S5D - 5 mm	S5D - 6 mm
Ref. number	D571	D572	D573	D574	D575	D576
Length	H: 1 mm	H: 2 mm	H: 3 mm	H: 4 mm	H: 5 mm	H: 6 mm
Material	Titanium 6AL-4V					
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.					

## Easy-Fix angular abutments - S5D - S7D - 17°



Product code	S5 - S7D - 17°, 1 mm	S5 - S7D - 17°, 2 mm	S5 - S7D - 17°, 3 mm
Ref. number	D32171 / C441	D32172 / C441	D32173 / C441
Length	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw. The basic package contains 1 mm S5 part.		


## Easy-Fix angular abutments - S5D - S7D - 30°



Product code	S5 - S7D - 30°, 1 mm	S5 - S7D - 30°, 2 mm	S5 - S7D - 30°, 3 mm
Ref. number	D32301 / C441	D32302 / C441	D32303 / C441
Length	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw. The basic package contains 1 mm S5 part.		



## Accessories for Easy-Fix



◀ **T1-S5 Transfer**


Ref. num.:  
C58




◀ **A1-S5 Analog**

Ref. num.:  
C59


## S5 - S7D Easy-Fix parts

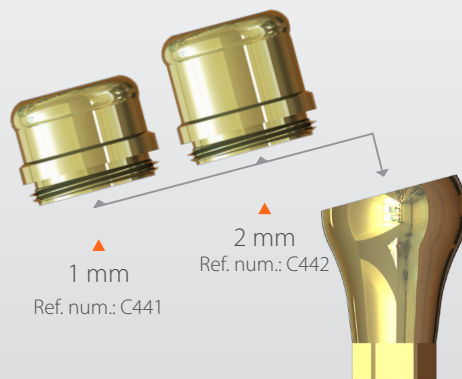

## Package contains:

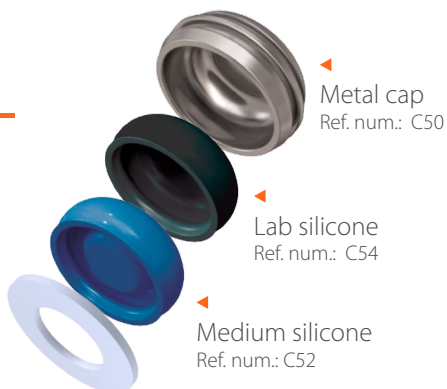

◀ **K2 hand tool**

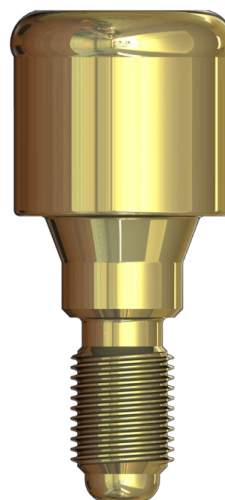


◀ **S5D overdenture abutment**





## Smart-Lock abutments - S8D

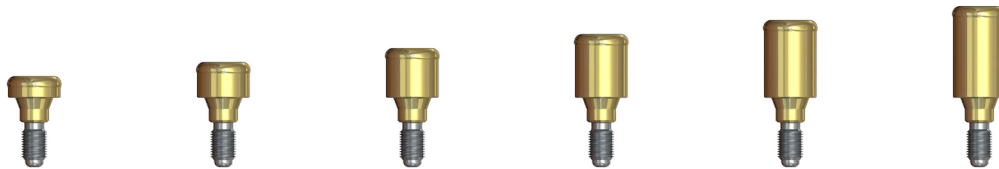


Product code	S8D - 1 mm	S8D - 2 mm	S8D - 3 mm	S8D - 4 mm	S8D - 5 mm	S8D - 6 mm
Ref. number	D451	D452	D453	D454	D455	D456
Length	H: 1 mm	H: 2 mm	H: 3 mm	H: 4 mm	H: 5 mm	H: 6 mm
Material	Titanium 6AL-4V					
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.					

## Smart-Lock angular abutment - S8D - 15°



Product code	S8D - 15° - 1.5 mm	S8D - 15° - 3 mm
Ref. number	D461515	D46153
Length	H: 1.5 mm	H: 3 mm
Material	Titanium 6AL-4V	
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.	

## Package contains:

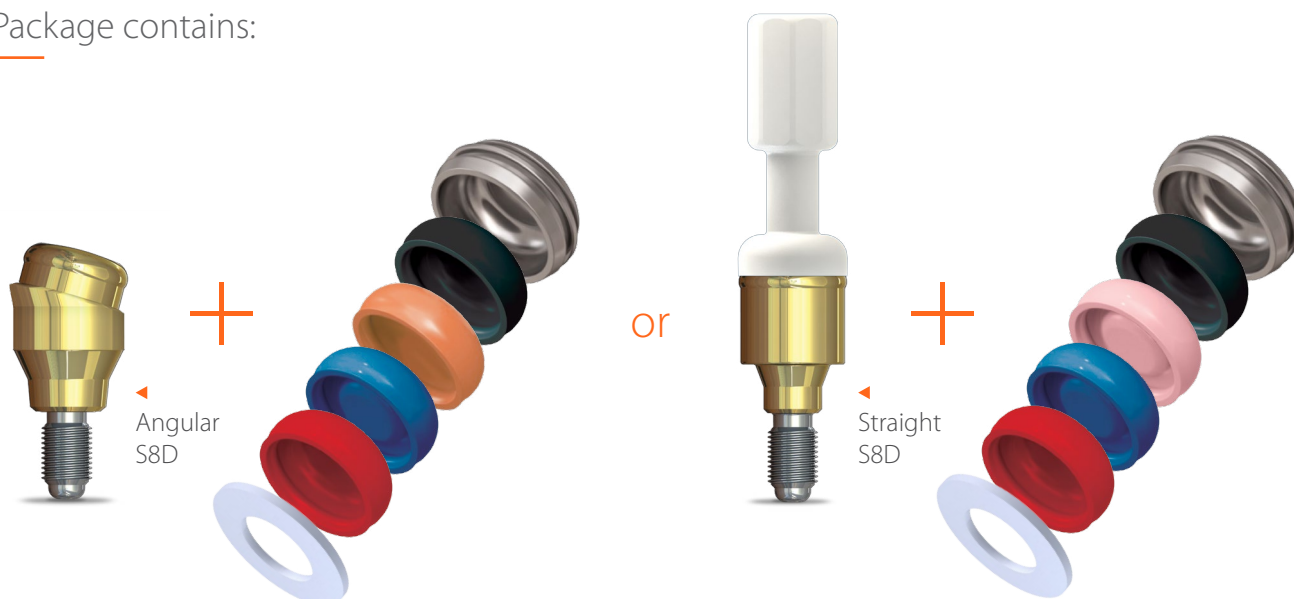





## Accessories for S8D



**T1-S8 Transfer**  
Ref. num.: C48



**A1-S8 Analog**  
Ref. num.: C49



**K4 Hand tool**  
Ref. num.: C56




**K4 hand tool**

Insertion part




**Magic tool**  
Ref. num.: C55

Removal part

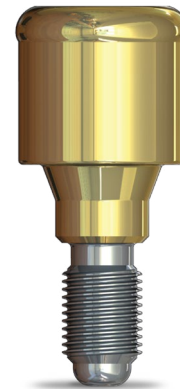

**S8D overdenture abutment**

## Smart-Lock overdenture abutment

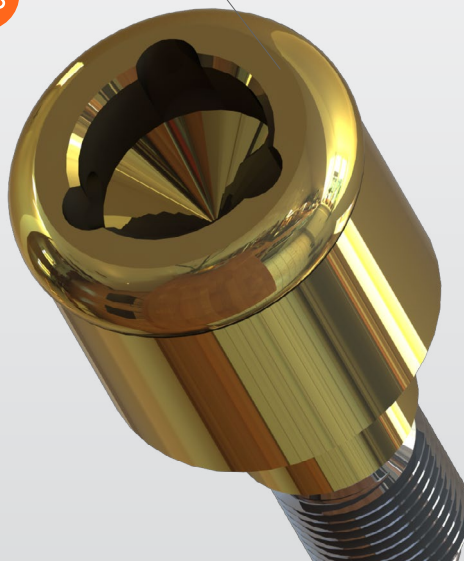





## Straight multi-unit abutment - S6D



Product code	S6D - 0.5 mm	S6D - 1.5 mm	S6D - 2.5 mm	S6D - 3.5 mm
Ref. number	D3105	D3115	D3125	D3135
Length	H: 0.5 mm	H: 1.5 mm	H: 2.5 mm	H: 3.5 mm
Material	Titanium 6AL-4V			
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.			

## Accessories for S6D




◀ **H - S6 / S7**  
Healing cap  
Ref. num.: C33



◀ **T1 - S6 / S7**  
Transfer  
Ref. num.: C34



◀ **A1 - S6 / S7**  
Analog  
Ref. num.: C35



◀ **T - S6 / S7**  
Titanium sleeve  
Ref. num.: C36



◀ **PH - S6 / S7**  
Plastic sleeve with hex  
Ref. num.: C37



◀ **P - S6 / S7**  
Plastic sleeve without hex  
Ref. num.: C38






## Prosthetic options

A

Final restoration ▶

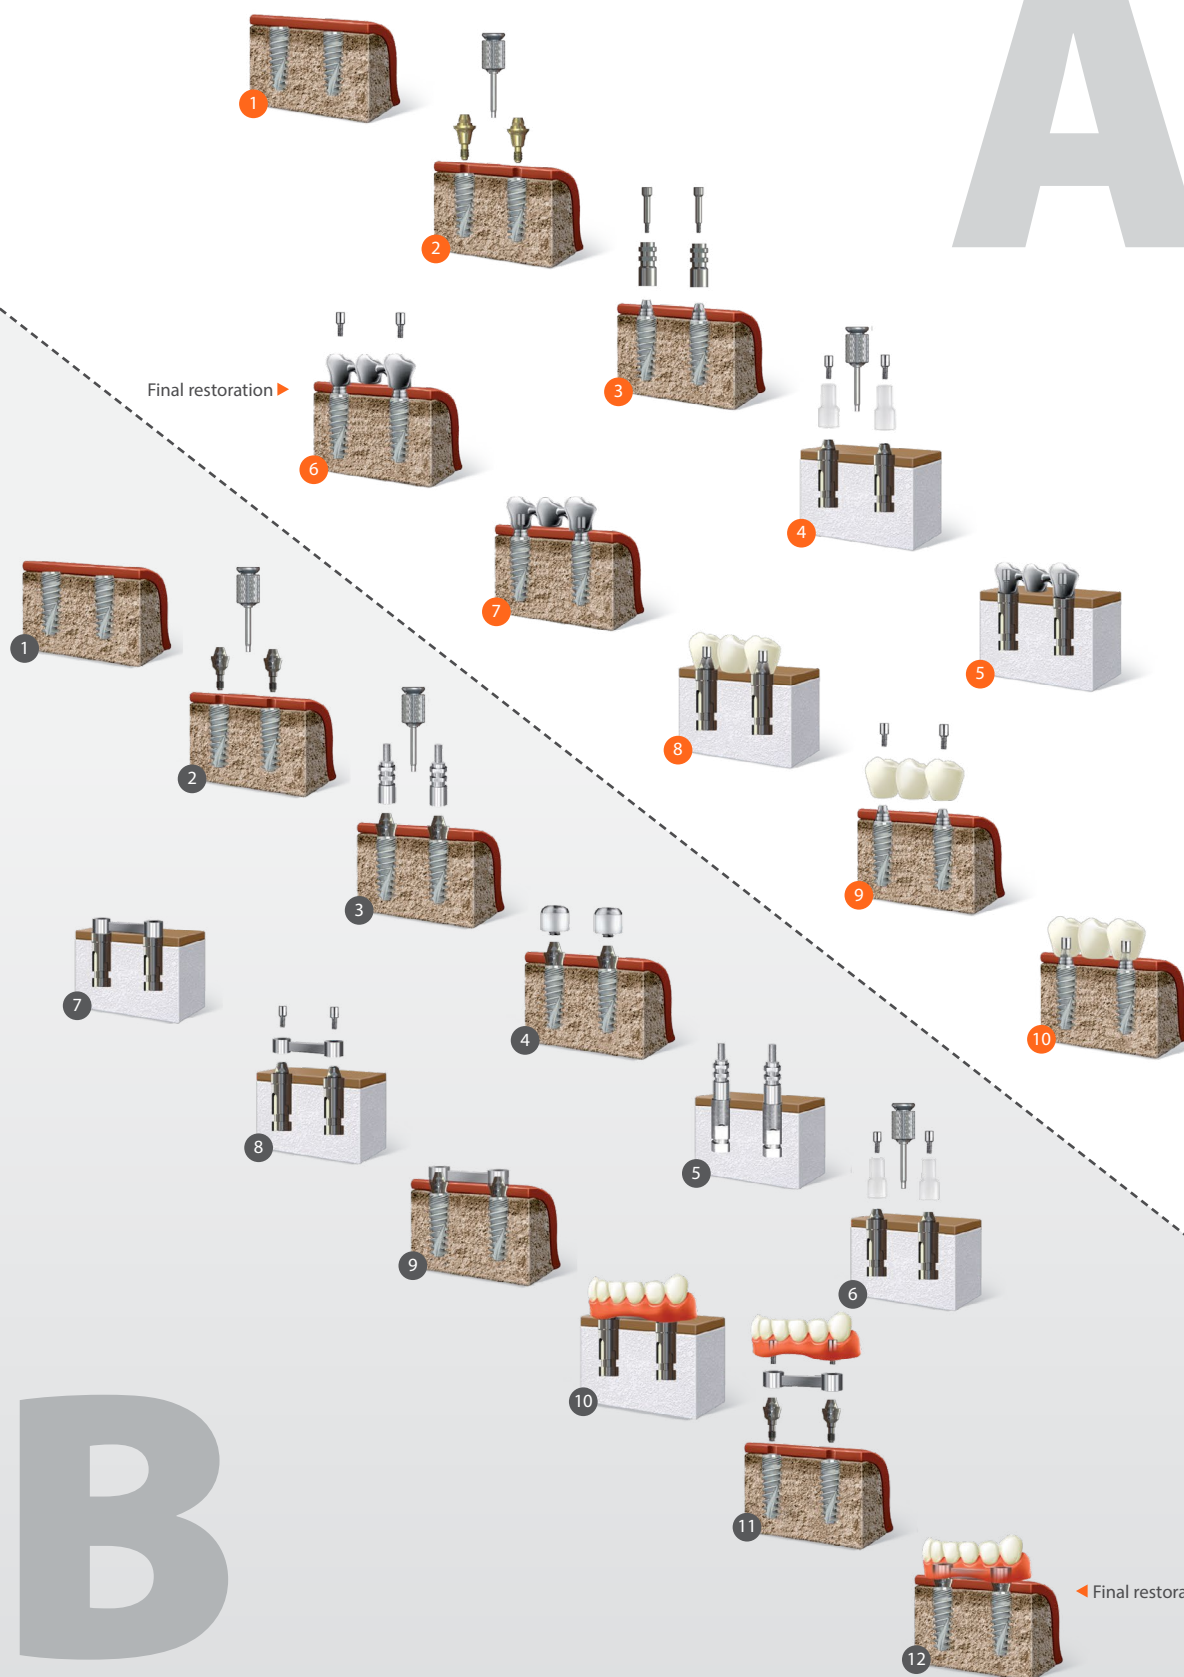

B

◀ Final restoration



## Multi-base angular abutment - S7D - 17°



Product code	S7D - 17° - 1 mm	S7D - 17° - 2 mm	S7D - 17° - 3 mm
Ref. number	D32171	D32172	D32173
Length	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.		

## Multi-base angular abutment - S7D - 30°



Product code	S7D - 30°, 1 mm	S7D - 30°, 2 mm	S7D - 30°, 3 mm
Ref. number	D32301	D32302	D32303
Length	H: 1 mm	H: 2 mm	H: 3 mm
Material	Titanium 6AL-4V		
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.		





## Accessories for S7D




◀ **H - S6 / S7**  
Healing cap  
Ref. num.: C33



◀ **T1 - S6 / S7**  
Transfer  
Ref. num.: C34



◀ **A1 - S6 / S7**  
Analog  
Ref. num.: C35




◀ **T - S6 / S7**  
Titanium sleeve  
Ref. num.: C36



◀ **PH - S6 / S7**  
Plastic sleeve with hex  
Ref. num.: C37



◀ **P - S6 / S7**  
Plastic sleeve without hex  
Ref. num.: C38

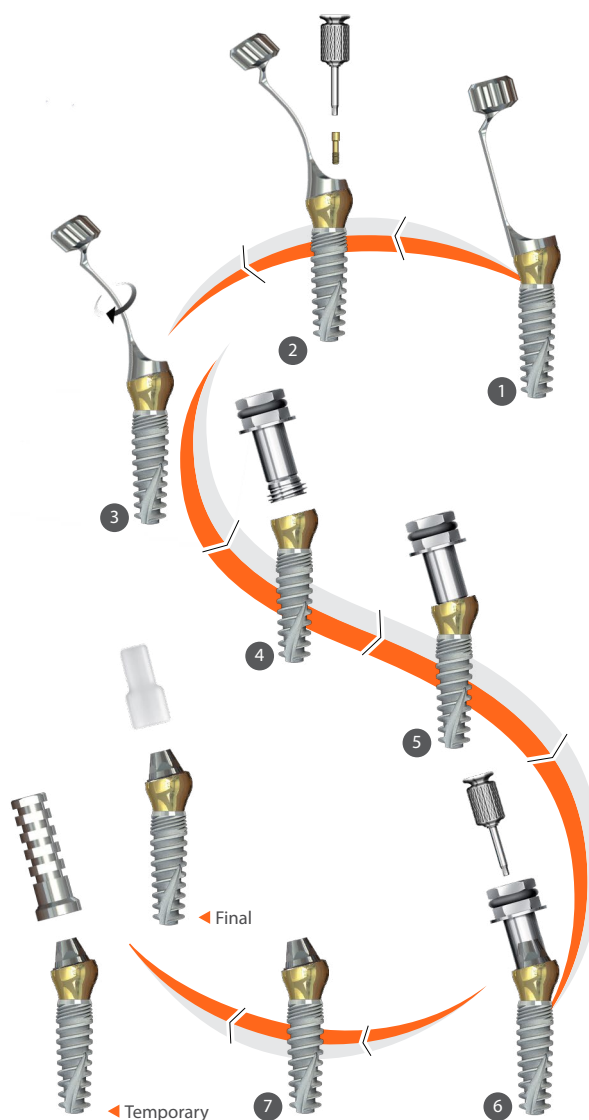

## S7D screw type abutment



◀ For more information  
check the video





## The-One multi-unit abutments - S16D



Product code	S16D - 1 mm	S16D - 2 mm	S16D - 3 mm	S16D - 4 mm
Ref. number	D641	D642	D643	D644
Length	H: 1 mm	H: 2 mm	H: 3 mm	H: 4 mm
Material	Titanium 6AL-4V			
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.			

## The-One angular multi-unit abutments - S17D - 17°



Product code	S17D - 17° - 1 mm	S17D - 17° - 2 mm	S17D - 17° - 3 mm	S17D - 17° - 4 mm
Ref. number	D65171	D65172	D65173	D65174
Length	H: 1 mm	H: 2 mm	H: 3 mm	H: 4 mm
Material	Titanium 6AL-4V			
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.			

## The-One angular multi-unit abutments - S17D - 30°



Product code	S17D - 30° - 1 mm	S17D - 30° - 2 mm	S17D - 30° - 3 mm	S17D - 30° - 4 mm
Ref. number	D65301	D65302	D65303	D65304
Length	H: 1 mm	H: 2 mm	H: 3 mm	H: 4 mm
Material	Titanium 6AL-4V			
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.			



## The-One angular multi-unit abutments - S17D - 45°

45°



45°



45°



45°



Product code	S17D - 45° - 1 mm	S17D - 45° - 2 mm	S17D - 45° - 3 mm	S18D - 45° - 4 mm
Ref. number	D65451	D65452	D65453	D65454
Length	H: 1 mm	H: 2 mm	H: 3 mm	H: 4 mm
Material	Titanium 6AL-4V			
Instructions	⚠ Recommended tightening torque 25 Ncm for the screw.			

## Accessories for S16D / S17D



T1 - S16/S17  
Transfer  
Ref. num.: C67



P - S16/S17  
Plastic sleeve  
without hex  
Ref. num.: C71



H - S16/S17  
Healing cap  
Ref. num.: C66



A1 - S16/S17  
Analog  
Ref. num.: C68




T - S16/S17  
Titanium sleeve  
Ref. num.: C69



PC - S16/S17  
Chrome Cobalt sleeve  
Ref. num.: C70

**MULTI-UNIT**  
evolution

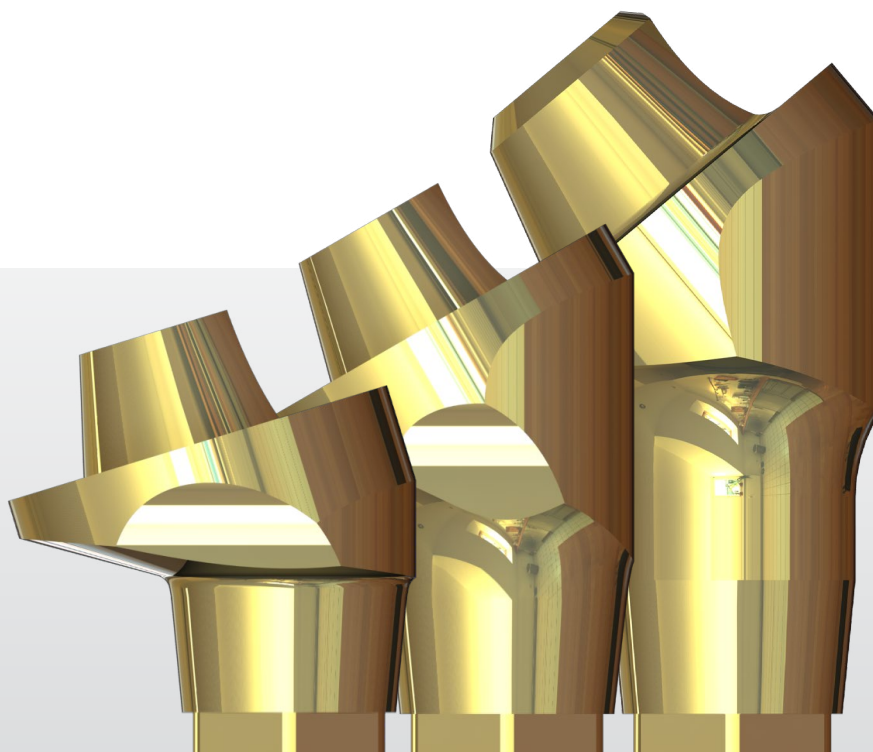





## Flat connection abutments



Product code

S15D - PT

S15D - T

Ref. number

D30

D28

Length

15 mm


15 mm


Material

Plastic / Chrome-cobalt

Titanium 6AL-4V

Instructions

 Recommended tightening torque 25 Ncm for the screw.

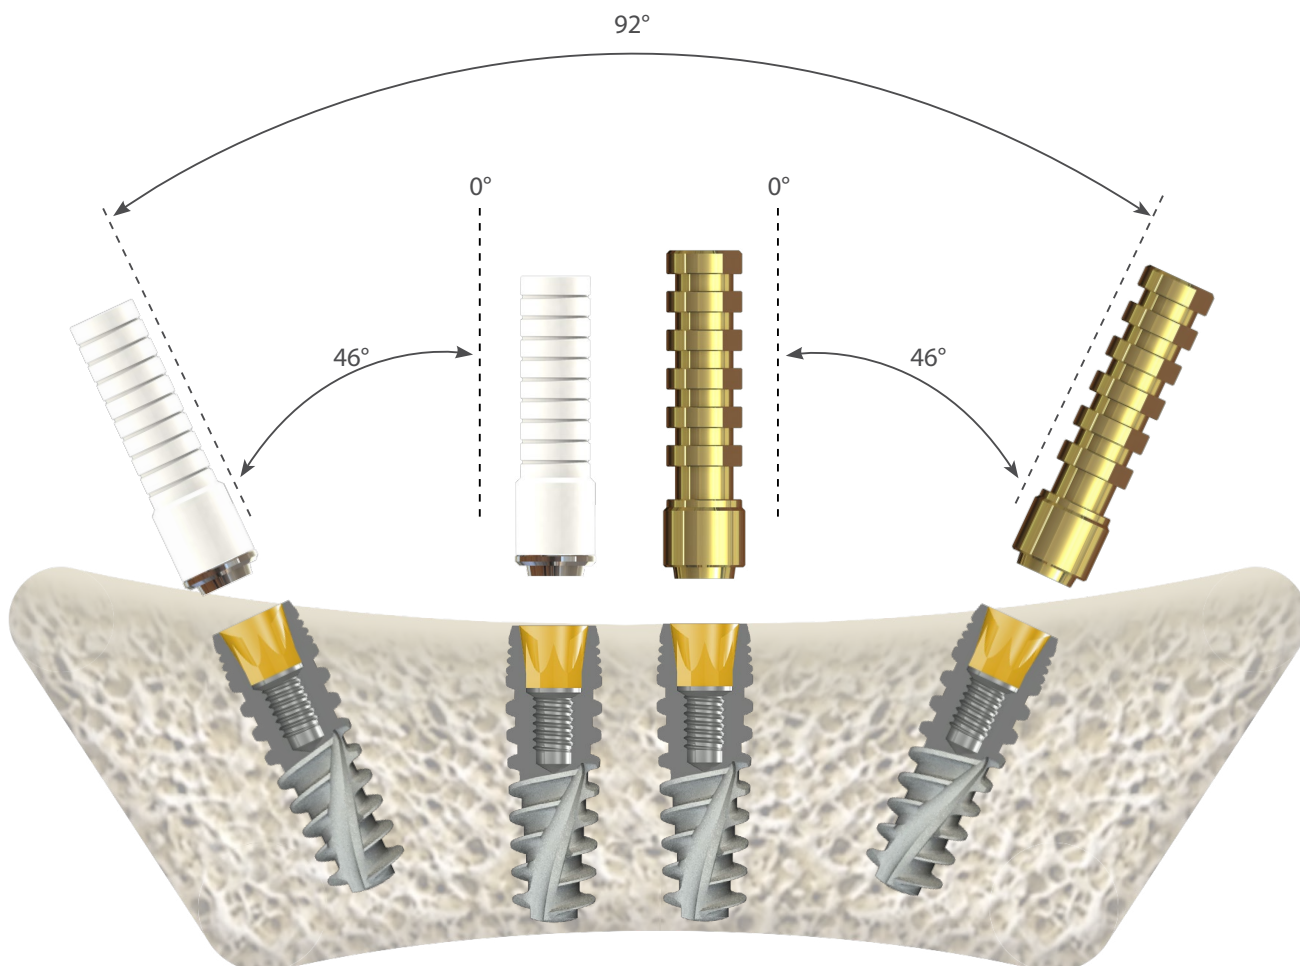






# ONE-PIECE IMPLANT

---

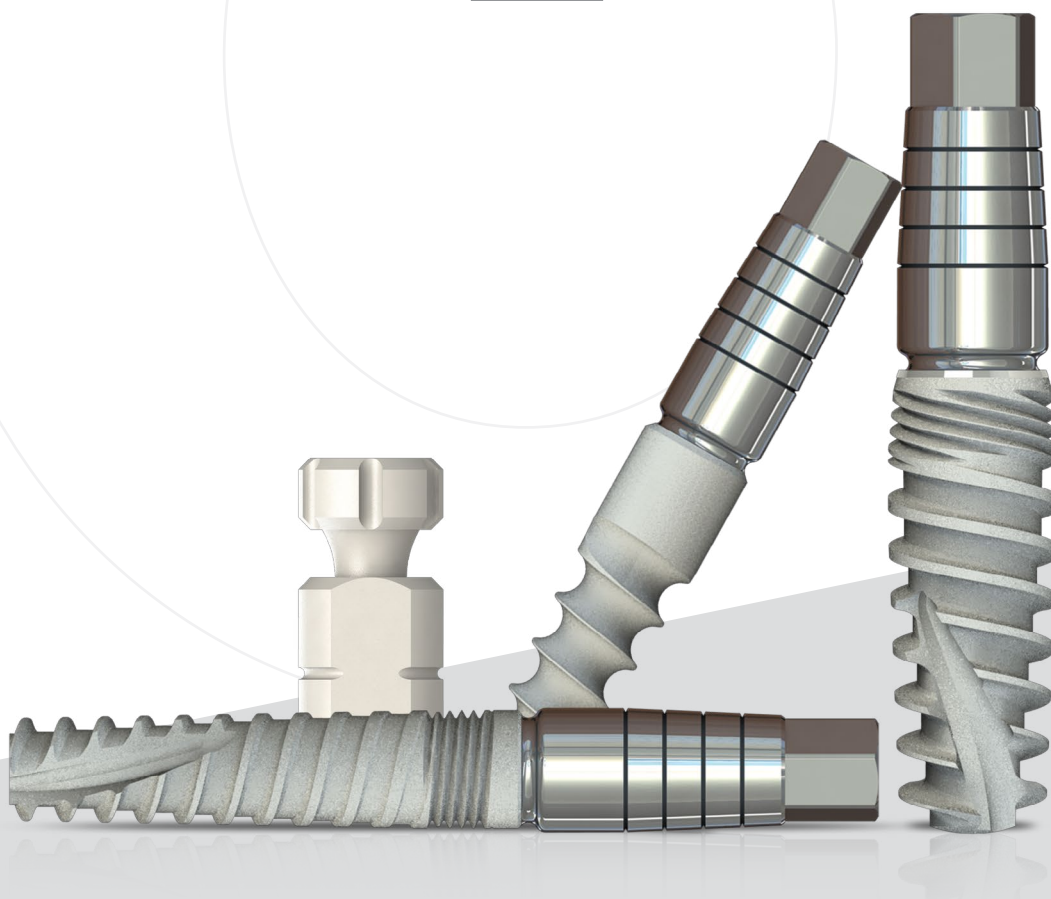

**3**

P7S  
NARROW

Length	10 mm	11,5 mm	13 mm	16 mm
Ref. number	O05310	O05311	O05313	O05316


**3,2**

P7S  
NARROW

Length	8 mm	10 mm	11,5 mm	13 mm	16 mm
Ref. number	O05328	O053210	O053211	O053213	O053216

**3,75**

Length	8 mm	10 mm	11,5 mm	13 mm	16 mm
Ref. number	O05378	O053710	O053711	O053713	O053716

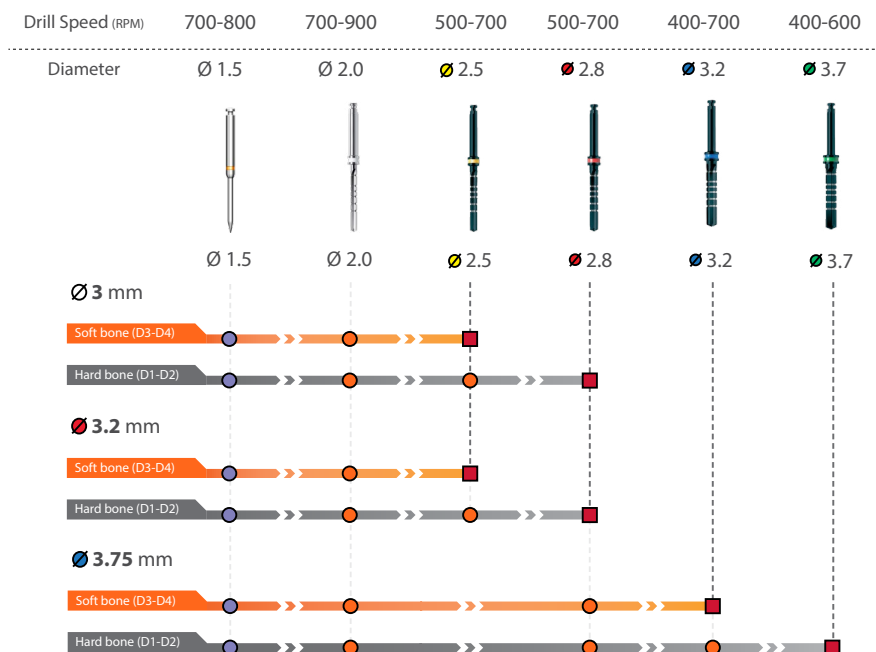

- Marker drill - used to make only a mark
- Throughout entire implant's length
- Drill only through the cortical bone, should not be used to full depth.  
If the cortical bone is hard (D1), you may use this drill as a countersink.

An additional 0,8 - 1,0 mm must be added to the length of the drill to account for the angled cutting up.  
Procedure recommended by SGS cannot replace the judgment and the experience of the surgeon!

**4,2**

Length	8 mm	10 mm	11,5 mm	13 mm	16 mm
Ref. number	O05428	O054210	O054211	O054213	O054216

**5**


Length	6 mm	8 mm	10 mm	11,5 mm	13 mm	16 mm
Ref. number	O0556	O0558	O05510	O05511	O05513	O05516

**6**

Length	6 mm	8 mm	10 mm	11,5 mm	13 mm	16 mm
Ref. number	O0566	O0568	O05610	O05611	O05613	O05616

Drill Speed (RPM) 700-800 700-900 500-700 500-700 400-700 400-600 400-600 400-600 300-500

Diameter Ø 1.5 Ø 2.0 Ø 2.5 Ø 2.8 Ø 3.2 Ø 3.7 Ø 4.0 Ø 4.5 Ø 5.5

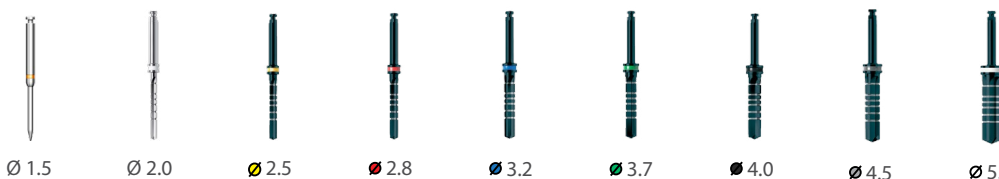**Ø 4.2 mm****Ø 5 mm****Ø 6 mm**

- Marker drill - used to make only a mark
- Throughout entire implant's length
- Drill only through the cortical bone, should not be used to full depth.  
If the cortical bone is hard (D1), you may use this drill as a countersink.

An additional 0,8 - 1,0 mm must be added to the length of the drill to account for the angled cutting up.  
Procedure recommended by SGS cannot replace the judgment and the experience of the surgeon!

**2,4**

P9S  
NARROW


Length

10 mm

11,5 mm

13 mm

16 mm

Ref. number

R062410

R062411

R062413

R062416

**3,0**

P9S  
NARROW


Length

10 mm

11,5 mm

13 mm

16 mm

Ref. number

R06310

R06311

R06313

R06316

**3,2**

P9S  
NARROW


Length

10 mm

11,5 mm

13 mm

16 mm


Ref. number

R063210

R063211

R063213

R063216

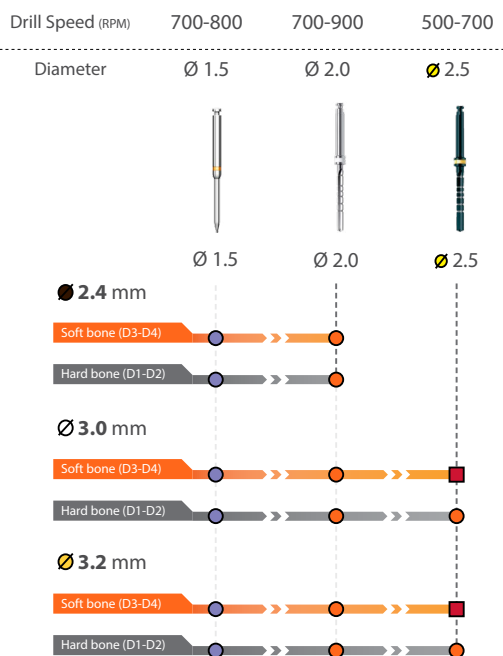


An additional 0,8 - 1,0 mm must be added to the length of the drill to account for the angled cutting up.  
Procedure recommended by SGS cannot replace the judgment and the experience of the surgeon!


## Instrument tools and drivers

Product code	K5 - 0 mm	K5 - 9 mm	K6	K8 - 23 mm	K8 - 28 mm
Ref. number	B50	B59	ORB06	B823	B828
Length	0 mm	9 mm	16 mm	23 mm	28 mm
Material	Stainless steel				
Instructions					

## Analog and transfer for P7S & P9S

Product code	A1 - P9S/P7S-N	T1 - P9S/P7S-N	A1 - P7S	T1 - P7S
Ref. number	OR08	OR77	O08	O77
Dimensions:	D: 3 mm	D: 3 mm	D: 3.6 mm	D: 3.6 mm
Material	Stainless steel	Plastic	Stainless steel	Plastic
Instructions	⚠ For P9S and P7S Ø3.0 / Ø3.2		⚠ For P7S Ø3.75 / Ø4.2 / Ø5 / Ø6	

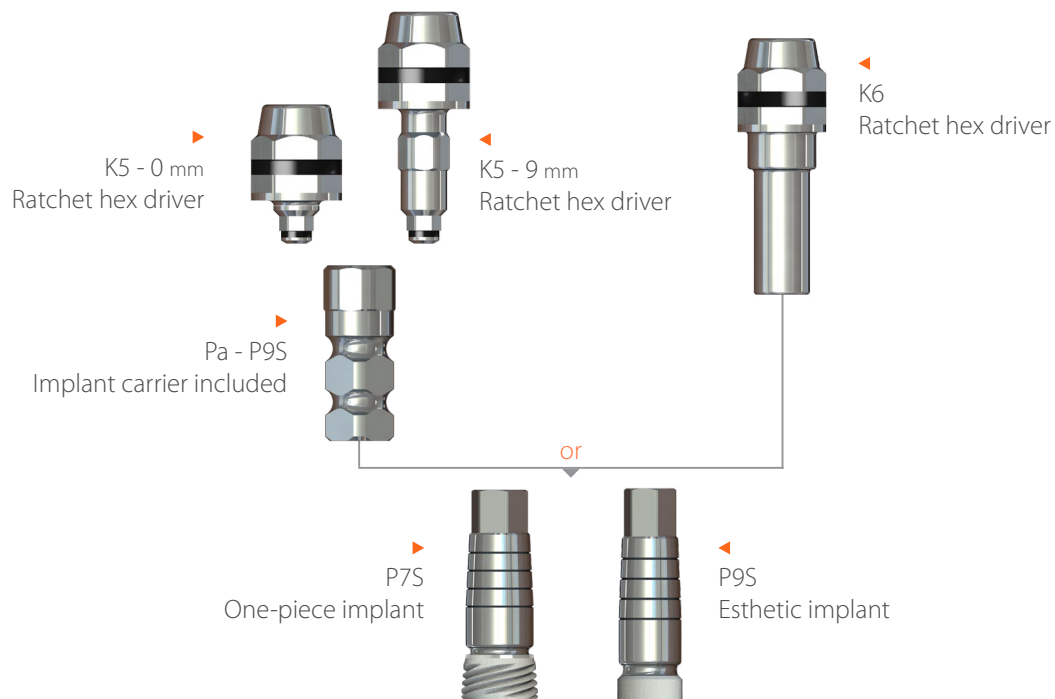

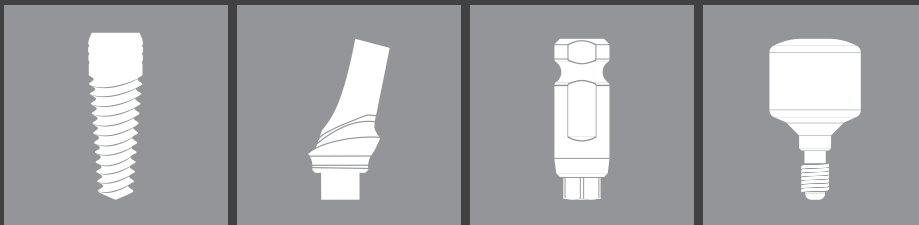

All solutions for a **perfect smile.**

Quality  
Long warranty  
Surgical tools  
Wide range of sizes  
Anatomic  
SGS De  
Ratchet Hex Driver  
Bone type  
Surgical instruments  
Favorable prices  
Ball attachment  
Angular  
Crilling  
Conus platform  
Small Hex  
Surgical tools  
Titanium  
Zirconium  
Knowledge  
Implant  
Prosthetic  
About  
Surgical kits





**SGS Dental Implant System Holding, reg No: FL-00023**

FL-9494, Schaan, Landstrasse 27  
Liechtenstein  
Tel.: 00423 233 5050, 00423 233 5051  
Fax: 00423 233 5052

**SGS International Kft./Ltd. European Logistic Center**

H-1047 Budapest, Károlyi István u. 1-3.  
Tel: +36 1 328 0427

[www.sgs-dental.com](http://www.sgs-dental.com)